


BIRCHEN TELESCOPIC MOUNT INSTALLATION

BIR-TEL

COMPATIBLE FIXTURES



Birchen Telescopic
Large (15W)



Birchen Telescopic
Medium (10W)



Birchen Telescopic
Small (5W)

INSTALLATION INSTRUCTIONS

Read instructions carefully to ensure proper installation.
Please keep this instruction manual for future use.

⚠ WARNING

To avoid the risk of fire, or electric shock this product should be installed, inspected and maintained by a qualified electrician only. Installation should be completely by an individual familiar with the construction and operation of the luminaire. Installation of luminaire must be in accordance with nation and local building and electrical codes.



Flammable



Warning



Low Voltage



Hot Surface

SAFETY WARNING

To avoid electric shock:

Be certain electrical power is OFF before and during installation and maintenance.

Luminaire must be supplied by a wiring system with an equipment grounding conductor.

To avoid burning hands:

Make sure lens and housing are cool when performing maintenance.

To avoid product degradation:

Make sure the wire supply voltage is the same as the luminaire supply.

Use proper supply wiring as specified on the luminaire nameplate.

Avoid use in environments containing sulfur, chlorine, or other halides, methyl acetate or ethyl acetate, cyanoacrylates, glycol ethers, formaldehyde or butadiene.

NOTES


Do not restrict luminaire ventilation.

Ensure LED luminaire is not covered with material that will prevent convection or conduction cooling.

Ensure LED luminaire has the correct polarity before installation.

Avoid exposing wiring to metal edges and sharp objects.


WIRING DIAGRAM

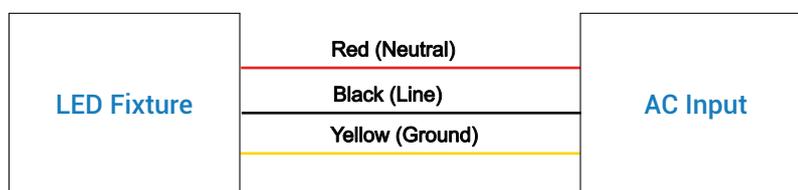



BIRCHEN TELESCOPIC MOUNT INSTALLATION

BIR-TEL


ASSEMBLED OUTLOOK

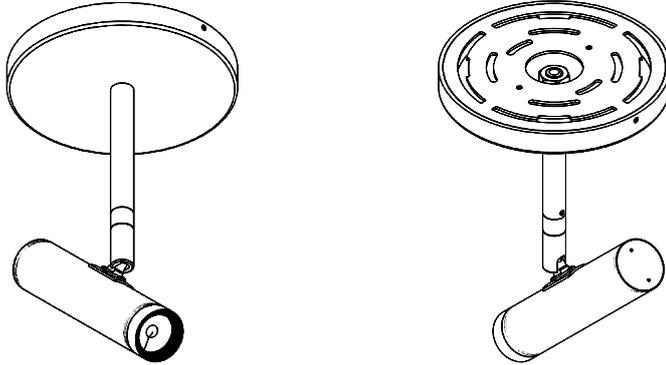


PARTS LIST

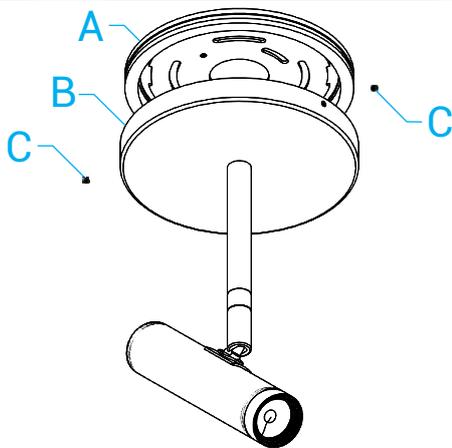

Ceiling Plate X1




Fixture X1




Set Screw X2

INSTRUCTIONS

STEP 1

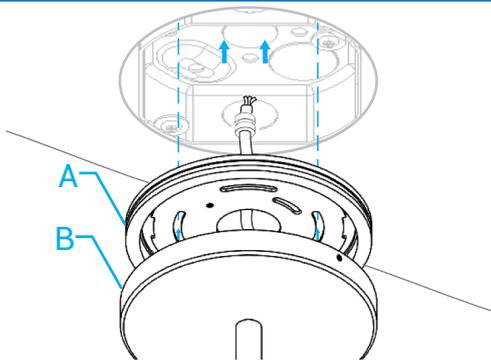


1.1) Feed the Fixture (B) cable wires through the Ceiling Plate (A), then connect cable wires with the Junction Box wires.

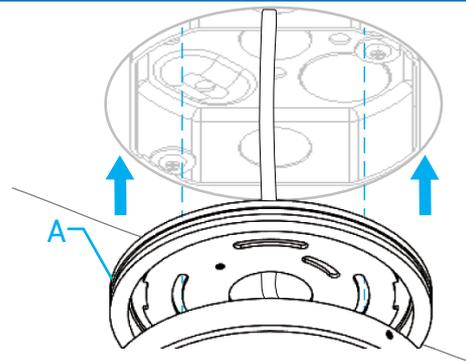


1.2) Align the Ceiling Plate (A) within the Junction Box.

STEP 2

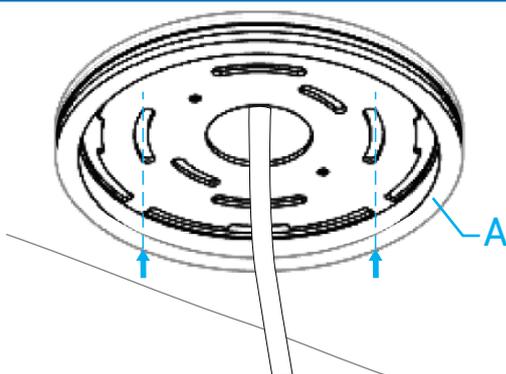

2.1) Proceed to secure Ceiling Plate (A) with fastenal screws. (Please note: Screws are not provided.)

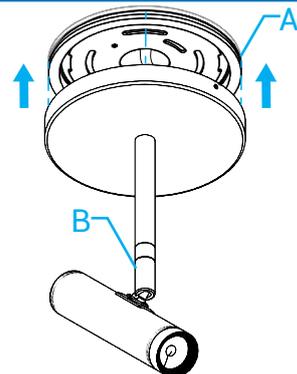


2.2) Align Fixture (B) cover plate with the Ceiling Plate (A).

BIRCHEN TELESCOPIC MOUNT INSTALLATION


BIR-TEL

STEP 3

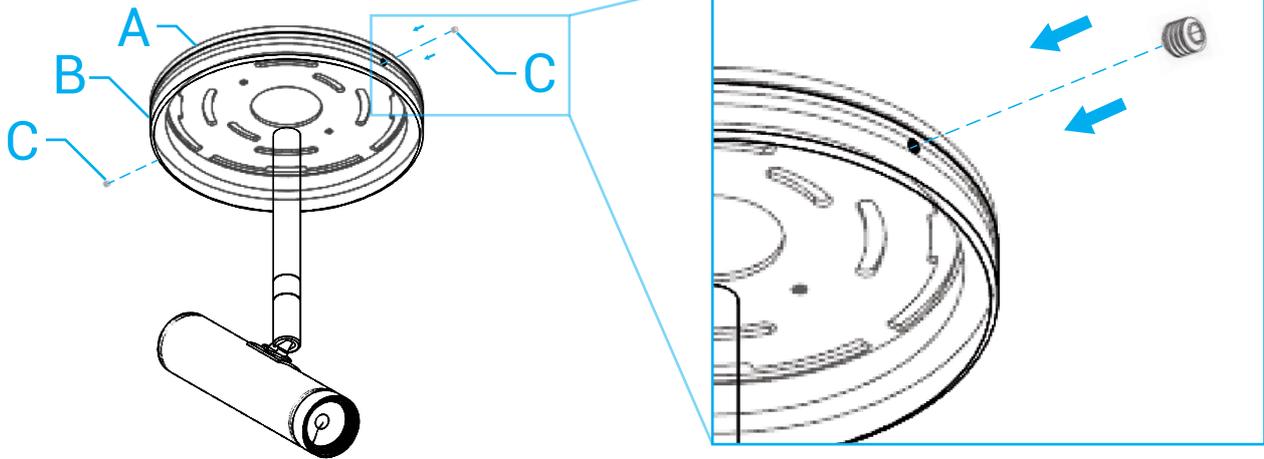

3.1) Secure Fixture (B) cover plate with the Ceiling Plate (A) by fastening the Set Screws (C).

STEP 4

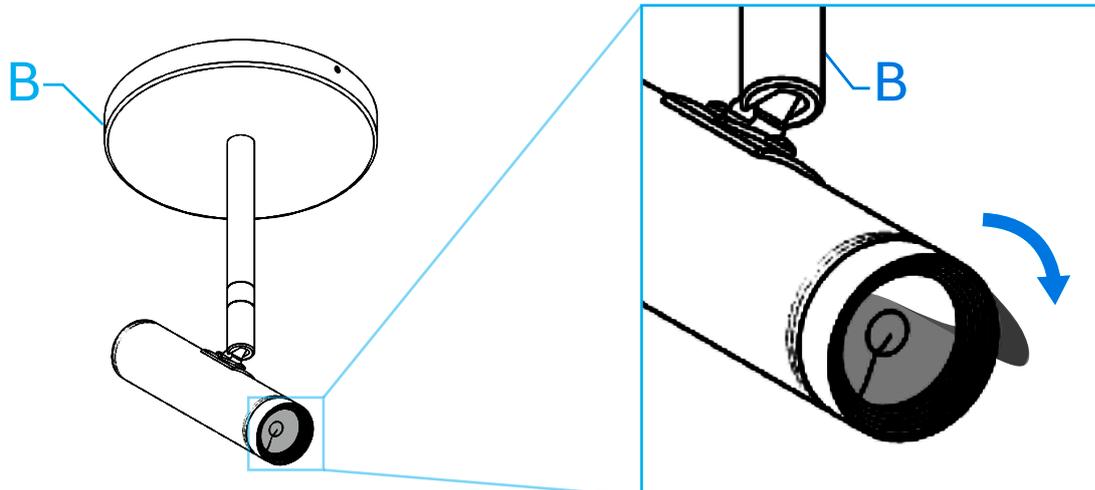

4.1) Remove the protective tape from the bottom light of the Fixture (A) prior to powering on.