



INSTALLATION INSTRUCTIONS

Read instructions carefully to ensure proper installation.
Please keep this instruction manual for future use.

WARNING

To avoid the risk of fire, or electric shock this product should be installed, inspected and maintained by a qualified electrician only. Installation should be completely by an individual familiar with the construction and operation of the luminaire. Installation of luminaire must be in accordance with nation and local building and electrical codes.



SAFETY WARNING

To avoid electric shock:

Be certain electrical power is OFF before and during installation and maintenance.

Luminaire must be supplied by a wiring system with an equipment grounding conductor.

To avoid burning hands:

Make sure lens and housing are cool when performing maintenance.

To avoid product degradation:

Make sure the wire supply voltage is the same as the luminaire supply.

Use proper supply wiring as specified on the luminaire nameplate.

Avoid use in environments containing sulfur, chlorine, or other halides, methyl acetate or ethyl acetate, cyanoacrylates, glycol ethers, formaldehyde or butadiene.

NOTES


Do not restrict luminaire ventilation.

Ensure LED luminaire is not covered with material that will prevent convection or conduction cooling.

Ensure LED luminaire has the correct polarity before installation.

Avoid exposing wiring to metal edges and sharp objects.

WIRING DIAGRAM

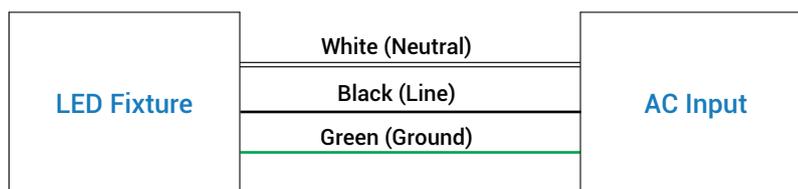


PLANAR INSTALLATION



PNR




ASSEMBLED OUTLOOK

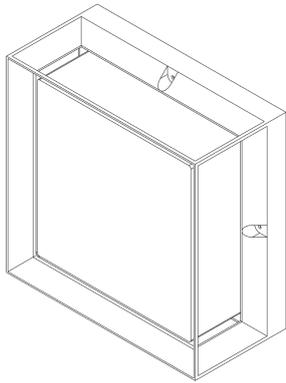


PARTS LIST

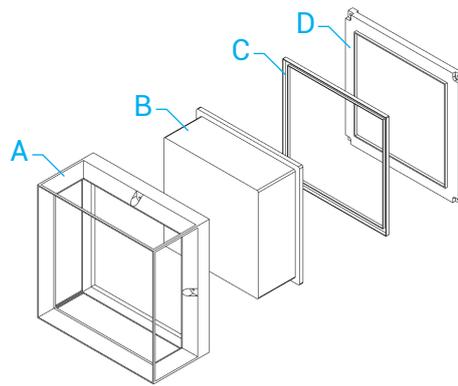

Outer Shell x1



Lens x1




Silicone Gasket x1




Base x1

INSTRUCTIONS


STEP 1



1.1) Unscrew (x4) hex screws.




1.2) Remove the Outer Shell (A), Lens (B) and Silicone Gasket (C).

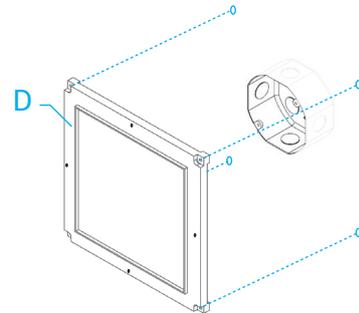


1.3) Use the Base (D) corner holes to mark and drill holes on the surface you would like to install the fixture. (Screws are not provided. Make sure the junction box is behind the Base (D))

STEP 2




2.1) Connect wires to the junction box according to the wiring diagram. (Junction box are not provided.)




2.2) Install the Base (D) to the surface with the 4 screws on the corners. (Screws are not provided.)

STEP 3

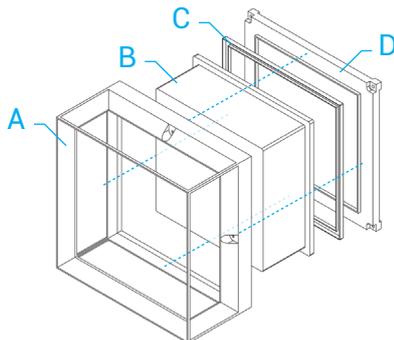

3.1) Place the Silicone Gasket (C), Lens (B) and Outer Shell (A) as per above image and screw the Outershell (A) to the Base (D).

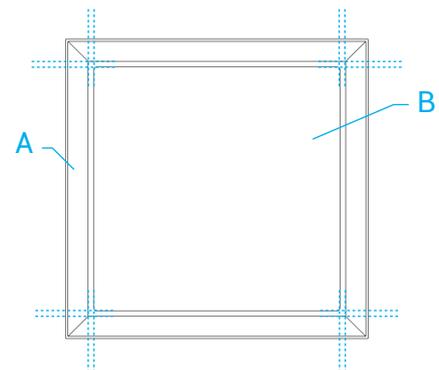

3.2) Ensure the gap between the Lens (B) and the Outer Shell (A) are equal before tightening the hex screws.