

GLAZE-1.0

GLZ 1.0

IP67

YYZ Glaze 1.0 Linear light, new model design, handy ,simple and easy to install. This kind of light adopts frosted acrylic diffuser of high light transmittance.

FEATURES



NO.OF LEDs	80 LEDs/mtr
LED TYPE	OSRAM 2835
FINISH	ALUMINUM COLOR
LAMP LIFE	50,000 Hrs, L70 at 55°
MOUNTING	SURFACE MOUNTED (CLIP, CHANEL)
CONNECTION	OUTDOOR RATED CONNECTIONS
BEAM ANGLE	120°
DIMENSIONS	1000x32x64mm
OPERATION CONDITION TEMP	-20° C - +50° C
STORAGE TEMP	-40° C - +80° C
HUMIDITY	91-95% at 20-30°C non-condensing
CONTROL	ON/OFF, DMX
DAISY CHAIN	7mtr
WEIGHT	0.60Kg
IK RATING	IK05
SDCM	≤7



ELECTRICAL DATA

POWER CONSUMPTION	12W/mtr, 15W/mtr
SUPPLY VOLTAGE	24V DC
CRI	80
COLORS	2700K/3000K/4000K/5000K/5700K, RGB, RGBW
DELIVERED LUMENS	50-52lm/W (Mono), 23lm/W (RGB), 25lm/W(RGBW)
FIXTURE LENGTH	300mm (4W), 500mm (7.5W), 1000mm (12, 15W), 1200mm (18W)

DIMENSIONS

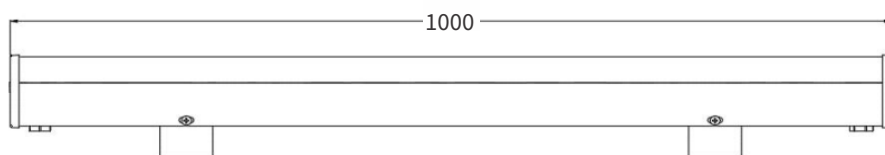

ORDERING LOGIC

PRODUCT	WATTAGE (1000mm)	COLOR TEMPERATURE	INPUT VOLTAGE	FIXTURE LENGTH	FINISH	CUSTOM
GLZ 1.0	12 - 12W	(CT 27)	24-24V DC	300 - 300mm	AL - Aluminum	xx - Custom
		(CT 30)		500 - 500mm	XX - Custom	
	15 - 15W	(CT 40)		1000 - 1000mm		
		(CT 50)		1200 - 1200mm		
		(CT57)				
		(RGB)		RGB		
		(RGBW)		RGBW		

Sample: GLZ 1.0 - 12 - CT27 - 24 - 300 - AL - XX