

TENTACLE (RECESSED) TTL-R & TTL-RT

Mono IP20 CE


YYZ Tentacle Recessed 6 features adjustable, drop down spots with directional gimbal rings. The system can be made in individual or continuous runs with a multitude of finish options. Available in recessed trim and trimless models.

TTL-R: (Trimless)

TTL-RT: (With Trim)


FEATURES

HOUSING	100% RECYCLABLE, EXTRUDED ARCHITECTURAL GRADE T6061 ALUMINIUM
BEAM ANGLE	15°, 24°, 38°, 48°
MOUNTING	RECESSED
OPTIC	GLASS
DIMENSIONS	1200, 2400mm x 157mm x 195mm
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 HRS
AVAILABLE LENGTH	1.2m, 2.4m
CONTROL	1-10V, NON-DIMMABLE, DALI, DMX

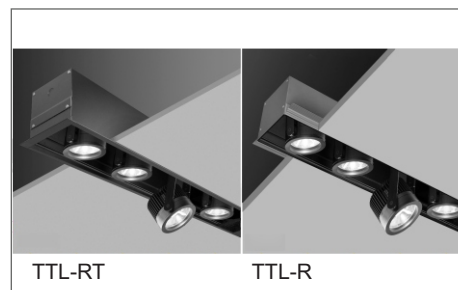

- CREE/SAMSUNG LED Quality
- 240V AC Working Voltage
- 18/26/38/49W Rated power

DIMENSION

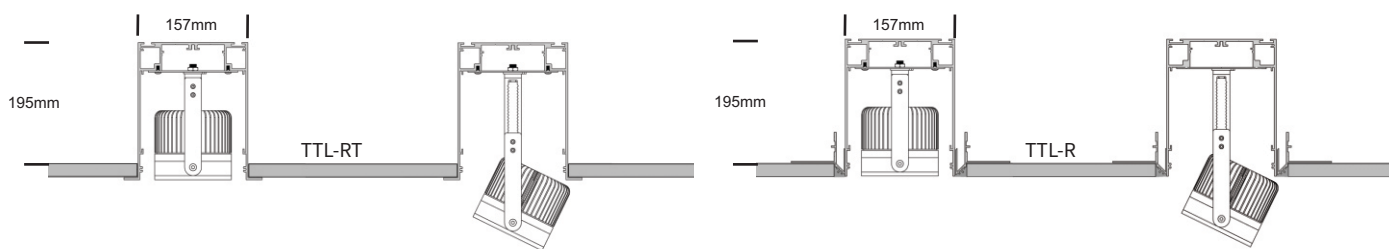

ORDERING LOGIC

PRODUCT	WATTAGE	CRI	COLOR TEMPERATURE	DRIVER	VOLTAGE	NUMBER OF HEAD	FINISH
TTL-R	18 - 18W	80	(CT30) 3000K	ND - ON-OFF	220 - 240 VAC	3 - 3Head	AL - Aluminium
TTL-RT	26 - 26W	90	(CT40) 4000K	AN - 1-10V		5 - 5Head	BK - Black
	38 - 38W			DA - DALI		7 - 5Head	WH - White
	49 - 49W			DX - DMX			XX - Custom

Sample: TTL-R - 18 - 80 - CT30 - ND - 220 - 3 - AL