

# TENTACLE (SURFACE) TTL-S & TTL-SM

**Mono** IP20 CE

YYZ Tentacle Surface 6 features adjustable, drop down spots with directional gimbal rings. The system can be made in individual or continuous runs with a multitude of finish options. Available in surface mounted configurations.

TTL-S: (Suspended)

TTL-SM: (Surface mount)


## FEATURES

HOUSING	100% RECYCLABLE, EXTRUDED ARCHITECTURAL GRADE T6061 ALUMINIUM
BEAM ANGLE	15°, 24°, 38°, 48°
MOUNTING	SURFACE MOUNT, SUSPENDED
OPTIC	GLASS
DIMENSIONS	157mm x 195mm
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 HRS
AVAILABLE LENGTH	1.2m
CONTROL	1-10V, NON-DIMMABLE, DALI, DMX



- CREE/SAMSUNG LED Quality
- 240V AC Working Voltage
- 18/26/38/49W Rated power

## DIMENSION

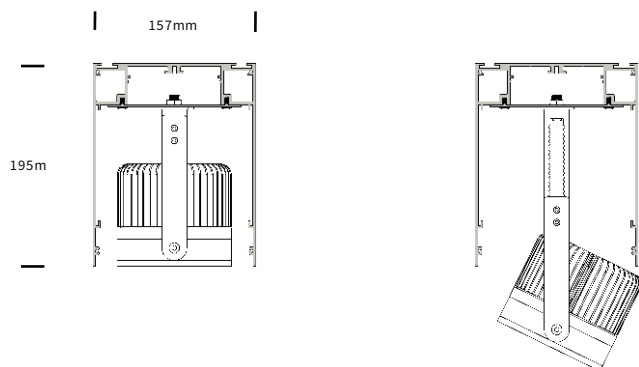

## ORDERING LOGIC

PRODUCT	WATTAGE	CRI	COLOR TEMPERATURE	DRIVER	VOLTAGE	NUMBER OF HEAD	FINISH
TTL-S	18 - 18W	80	(CT30) 3000K	ND - Non-Dim	220 - 240 VAC	3 - 3 Heads	AL - Aluminium
TTL-SM	26 - 26W	90	(CT40) 4000K	AN - 1-10V		5 - 5 Heads	BK - Black
	38 - 38W		(CT TW) Tunable White	DA - DALI		7 - 7 Heads	WH - White
	49 - 49W		(RGBW) RGBW	DX - DMX			BR - Bronze
							RA - RAL
							XX - Custom

Sample: TTL-S - 18 - 80 - CT30 - ND - 220 - 3 - AL