

TENTACLE NEO


TTL-N-R & TTL-N-RT

Mono IP20 CE

YYZ Tentacle Recessed 6 features adjustable, drop down spots with directional gimbal rings. The system can be made in individual or continuous runs with a multitude of finish options. Available in recessed trim and trimless models.

TTL-N-R: (Trimless)

TTL-N-RT: (With Trim)

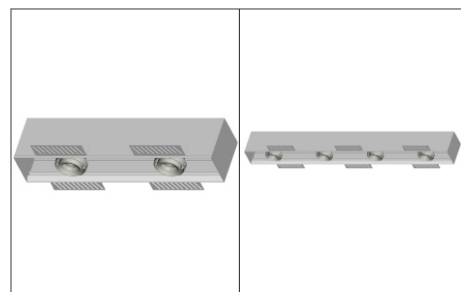


FEATURES

HOUSING	100% RECYCLABLE, EXTRUDED ARCHITECTURAL GRADE T6061 ALUMINIUM
BEAM ANGLE	24°
MOUNTING	RECESSED
OPTIC	ANTI-GLARE LENS
DIMENSIONS	600 x 122mm(2 Head), 1200 x 122mm(4 Head)
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 HRS
LUMEN	1700 lm
CONTROL	NON-DIMMABLE, TRIAC, 1-10V, DALI

- LUMILEDS
LED Quality
- 240V AC
Working Voltage
- 20W
Rated power

DIMENSION

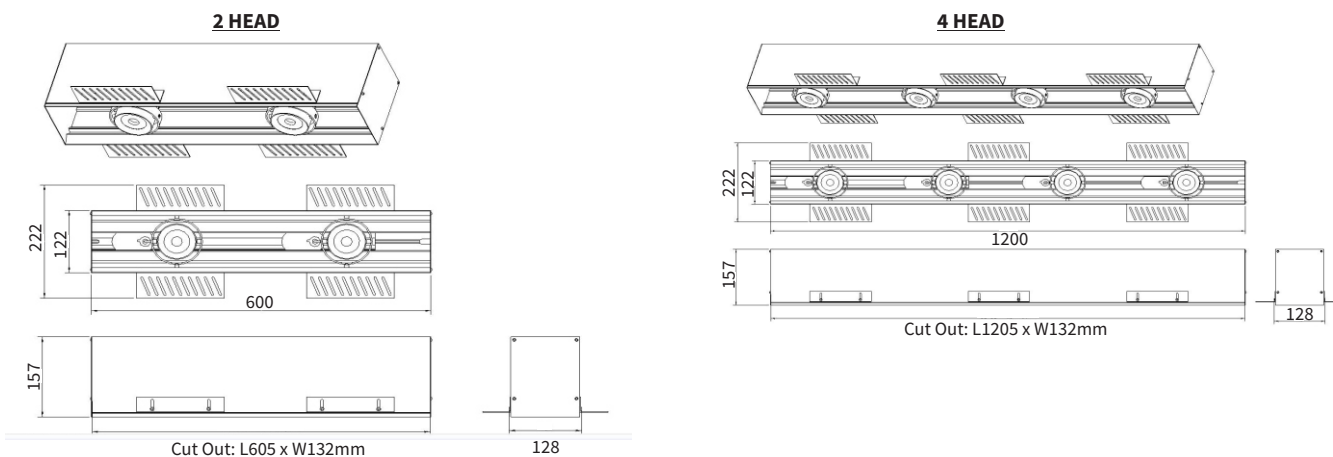

ORDERING LOGIC

PRODUCT	WATTAGE	CRI	COLOR TEMPERATURE	DRIVER	VOLTAGE	NUMBER OF HEAD	FINISH
TTL-N-R	20 - 20W	90	(CT30) 3000K	ND - ON-OFF	220 - 240V AC	2 - 2Head	AL - Aluminium
TTL-N-RT			(CT40) 4000K	AN - 1-10V DA - DALI TR - TRIAC		4 - 4Head	BK - Black WH - White XX - Custom

Sample: TTL-N-R - 20 - 90 - CT30 - ND - 220 - 2 - AL