

INDOOR WARDROBE LIGHT-WL

WL-I-04.80-CTXX-2835-Z3-60-24-CV-1000-OP-CP-XX-XX

IP20
NON-WATER
PROOF

CE

4.8W

Our WL Series Linear Rigid Profiles are designed for wide range of architectural applications including surface mount, suspended installation where we need adjustable diffused lighting effects required. This light fixtures comes with 2 step adjustable front plate and diffuser cover with Opal, frosted and clear finish.



FEATURES LED STRIP

LIGHT SOURCE	2835 LED
LED QUANTITY	60 LEDs / m
FINISH	WHITE PCB
WORKING VOLTAGE	24 V
RATED CURRENT	200mA / m
RATED POWER	4.8W / m
RADIANCE ANGLE	120°
LAMP LIFE (L80 B 10)	54000 Hrs

60 LEDs / m
LED Quality

24V
Working Voltage

4.8W / m
Rated power

ELECTRICAL DATA



POWER CONSUMPTION	4.80W
SUPPLY VOLTAGE	24 VOLTS
SUPPLY CURRENT	200mA
BINNING TOLERANCE	2250K-2475K (BIN:22B) / 2700K-2830K (BIN:WK2,WP2) / 2830K-3040K (BIN:WK3,WP3) 3900K-4258K (BIN:NK2,NP2) / 6000K-7034K (BIN:PK5,PK6)
COLORS	WHITE: 2200K / 2700K / 3000K / 3500K/ 4000K / 5000K/ 6000K UNIQUE COLORS: RED / GREEN / BLUE / CUSTOM
CRI	90
LEDS / 3.3FT	60

IP 20(Indoor)



COLOR TEMPERATURE DATA

White	Lumens/mtr		Colors	Lumens/mtr	
2200K (CT 22)	432	(CT 22)	RED (CT RD)	170	(CT RD)
2700K (CT 27)	442	(CT 27)	BLUE (CT BL)	89	(CT BL)
3000K (CT 30)	456	(CT 30)	GREEN (CT GR)	465	(CT GR)
3500K (CT 35)	466	(CT 35)	CUSTOM (## ##)		
4000K (CT 40)	480	(CT 40)			
5000K (CT 50)	490	(CT 50)			
6000K (CT 60)	504	(CT 60)			

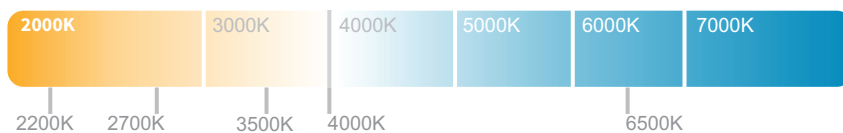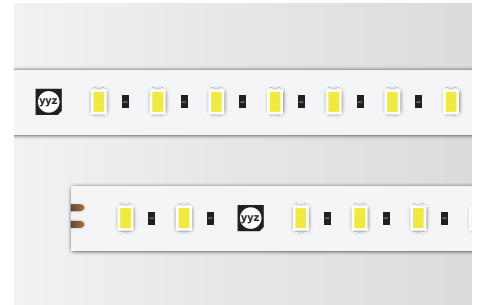

INDOOR WARDROBE LIGHT-WL



WL-I-04.80-CTXX-2835-Z3-60-24-CV-1000-OP-CP-XX-XX

ORDERING LOGIC

PRODUCT SERIES	TYPE	POWER	COLOR TEMPERATURE		LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	PROFILE LENGTH	DIFFUSER	MOUNTING	CONNECTION	CUSTOM
WL	I - INDOOR (IP20)	04.80 - 4.8W	(CT22)	2200K	2835	Z3	60-60 LEDs/mtr	24-24V	CV - Constant voltage	1000 - 1000mm	OP - Opal	CP - Clip	HT - Hardwired Tail	xx
			(CT27)	2700K						2000 - 2000mm	FR - Frosted	SP - Suspended	IC - Indoor Connector	
			(CT30)	3000K						3000 - 3000mm	CL - Clear			
			(CT35)	3500K						XXXX - Custom				
			(CT40)	4000K										
			(CT50)	5000K										
			(CT60)	6000K										
			(CTRD)	RED										
			(CTBL)	BLUE										
			(CTGR)	GREEN										
			(####)	CUSTOM										

Sample: WL - I - 04.80 - CT22 - 2835 - Z3 - 60 - 24 - CV - 1000 - OP - CP - HT - XX

PROFILE DIMENSIONS

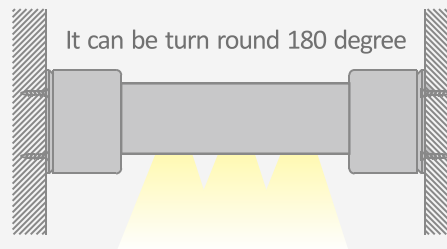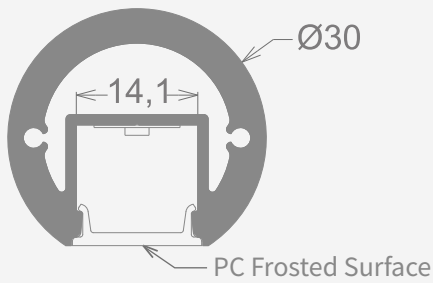


FIXING HOLDER



CENTER BRACKETS



PC FROSTED SURFACE



END CAP