

INDOOR WARDROBE SENSOR LIGHT-WSL

WSL-I-09.60-CTXX-2835-Z3-60-24-CV-ND-1000-OP-CP-XX-XX

IP20
NON-WATER
PROOF

CE

9.6W

Our WSL Series Linear Rigid Profiles are designed for wide range of architectural applications including surface mount, suspended installation where we need adjustable diffused lighting effects required. Product is designed for the customized application for wardrobe rail with sensor.



FEATURES LED STRIP

LIGHT SOURCE	2835 LED
LED QUANTITY	60 LEDs / m
FINISH	WHITE PCB
WORKING VOLTAGE	24 V
RATED CURRENT	200mA / m
RATED POWER	9.6W / m
RADIANCE ANGLE	120°
LAMP LIFE (L80 B 10)	54000 Hrs

60 LEDs / m
LED Quality

24V
Working Voltage

9.6W / m
Rated power

ELECTRICAL DATA



POWER CONSUMPTION	9.60W
SUPPLY VOLTAGE	24 VOLTS
SUPPLY CURRENT	200mA
BINNING TOLERANCE	2250K-2475K (BIN:22B) / 2700K-2830K (BIN:WK2,WP2) / 2830K-3040K (BIN:WK3,WP3) 3900K-4258K (BIN:NK2,NP2) / 6000K-7034K (BIN:PK5,PK6)
COLORS	WHITE: 2200K / 2700K / 3000K / 3500K/ 4000K / 5000K/ 6000K UNIQUE COLORS: RED / GREEN / BLUE / CUSTOM
CRI	90
LEDS / 3.3FT	60

IP 20(Indoor)



COLOR TEMPERATURE DATA

White	Lumens/mtr	Colors	Lumens/mtr
2200K (CT 22)	864 (CT 22)	RED (CT RD)	340 (CT RD)
2700K (CT 27)	883 (CT 27)	BLUE (CT BL)	177 (CT BL)
3000K (CT 30)	912 (CT 30)	GREEN (CT GR)	932 (CT GR)
3500K (CT 35)	931 (CT 35)	CUSTOM (## ##)	
4000K (CT 40)	960 (CT 40)		
5000K (CT 50)	979 (CT 50)		
6000K (CT 60)	1008 (CT 60)		

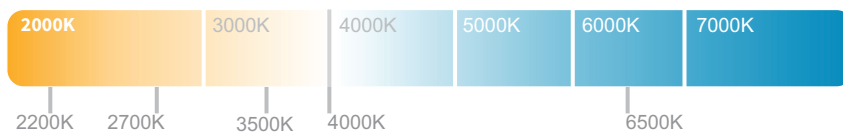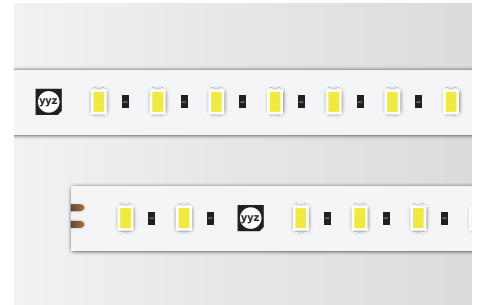

INDOOR WARDROBE SENSOR LIGHT-WSL



WSL-I-09.60-CTXX-2835-Z3-60-24-CV-ND-1000-OP-CP-XX-XX

ORDERING LOGIC

PRODUCT SERIES	TYPE	POWER	COLOR TEMPERATURE		LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	CONTROL	PROFILE LENGTH	DIFFUSER	MOUNTING	CONNECTION	CUSTOM
WSL	I - INDOOR (IP20)	09.60 - 9.6W	(CT22)	2200K	2835	Z3	60-60 LEDs/mtr	24-24V	CV - Constant voltage	ND - On/Off SR - IR Sensor	1000 - 1000mm	OP - Opal	CP - Clip	HT - Hardwired Tail	xx
			(CT27)	2700K							2000 - 2000mm	FR - Frosted	SP - Suspended	IC - Indoor Connector	
			(CT30)	3000K							XXXX - Custom	CL - Clear			
			(CT35)	3500K											
			(CT40)	4000K											
			(CT50)	5000K											
			(CT60)	6000K											
			(CTRD)	RED											
			(CTBL)	BLUE											
			(CTGR)	GREEN											
			(####)	CUSTOM											

Sample: WSL - I - 09.60 - CT22 - 2835 - Z3 - 60 - 24 - CV - ND - 1000 - OP - CP - HT - XX

PROFILE DIMENSIONS

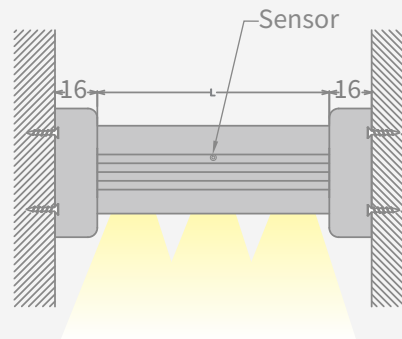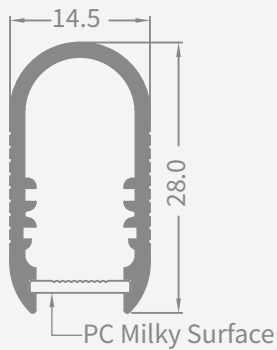

FIXING HOLDER



CENTER BRACKETS



FIXING CLIP



END CAP