

# IVORY SERIES

## IVY 140

Mono IP20 CE

YYZ Ivory series of architectural downlight features glare free performance with UGR ≤ 17 even for the ultra wide beam angle. Available in variety of sizes to accommodate wattage range from 10.5W to 50W making it versatile for applications with ceiling heights ranging from 2.8 to 10 meter.

### FEATURES

MATERIAL	Die-cast aluminum
FINISH	White, Black
RATED POWER	28W
WORKING VOLTAGE	24V DC
RADIANCE ANGLE	15°, 24°, 38°, 55°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø140x 73mm (Cutout Ø125mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off



LEDTEEN  
LED Quality


24V DC  
Working Voltage

28W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	28W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K
CRI	80, 90
LUMEN	2150 lm

### DIMENSIONS

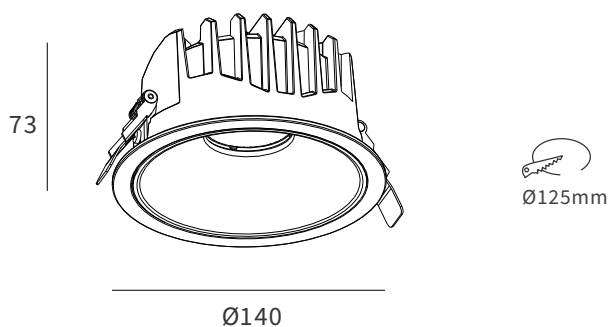

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	BEAM ANGLE	FINISH	REFLECTOR FINISH	
IVY 140	28 - 28W	(CT27)	2700K	15 - 15°	BK - Black	BL - Black Light
		(CT30)	3000K	24 - 24°	WH - White	BS - Bright Silver
		(CT40)	4000K	38 - 38°	XX - Custom	BB - Bright Black
				55 - 55°		BW - Bright White

Sample: IVY 140 - 28 - CT27 - 15 - BK - BL