

IVORY SERIES

IVY 212

Mono IP20 CE

YYZ Ivory series of architectural downlight features glare free performance with UGR ≤ 17 even for the ultra wide beam angle. Available in variety of sizes to accommodate wattage range from 10.5W to 50W making it versatile for applications with ceiling heights ranging from 2.8 to 10 meter.

FEATURES

MATERIAL	Die-cast aluminum
FINISH	White, Black
RATED POWER	50W
WORKING VOLTAGE	24V DC
RADIANCE ANGLE	24°, 38°, 55°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø212x 110mm (Cutout Ø200mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off



LEDTEEN
LED Quality


24V DC
Working Voltage

50W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	50W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K
CRI	80, 90
LUMEN	3800 lm

DIMENSIONS

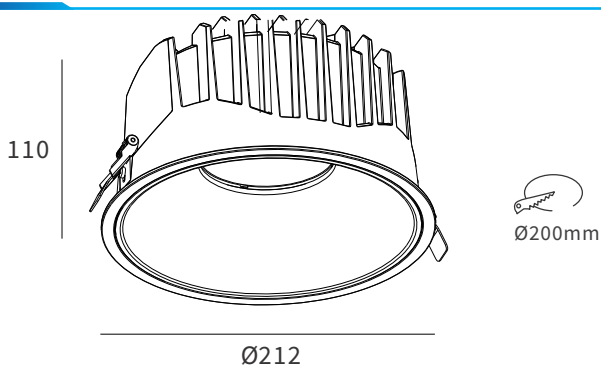

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	BEAM ANGLE	FINISH	REFLECTOR FINISH	
IVY 200	50 - 50W	(CT27)	2700K	24 - 24°	BK - Black	BL - Black Light
		(CT30)	3000K	38 - 38°	WH - White	BS - Bright Silver
		(CT40)	4000K	55 - 55°	XX - Custom	BB - Bright Black
					BW - Bright White	

Sample: IVY 200 - 50 - CT27 - 24 - BK - BL