

# BEAM TRIMLESS

## BMTL90

Mono IP20 CE

YYZ Beam series of architectural downlights feature die-cast aluminum heat sink construction ensuring excellent thermal management. Optical system comprises of lens fitted with conical system at the front to combine high performance with excellent glare control. Available in trim and trimless versions with various beam angles and RAL options(for the conical plate) to suit the demands of the space.

### FEATURES

MATERIAL	Die-cast aluminum
FINISH	White, Black, Grey
RATED POWER	10W
WORKING CURRENT	500mA
RADIANCE ANGLE	15°, 25°, 35° Symmetric
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø71 x 90mm(Cutout Ø77mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Triac, 1-10V, Dali



1 LED  
LED Quality


500mA  
Working Current

10W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	10W
SUPPLY VOLTAGE	220-240VAC
COLORS	2700K, 3000K, 3500K, 4000K, 5000K
CRI	90

### DIMENSIONS

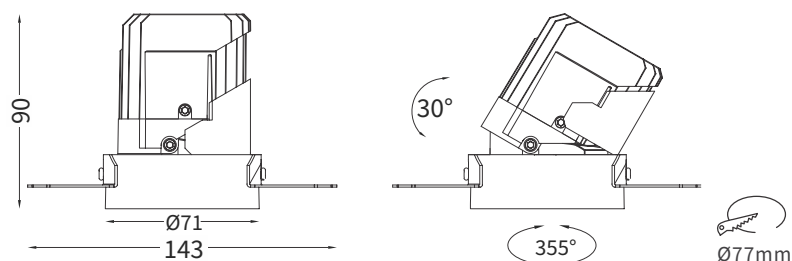

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE		CONTROL	BEAM ANGLE	FINISH	ACCESSORIES		CUSTOM
BMTL90	10 - 10W	(CT27)	2700K	ND - ON/OFF	15 - 15°	BK - Black	HC -	Honey Combo	xx
		(CT30)	3000K	TR - Triac	25 - 25°	WH - White	OB -	Optical Board	
		(CT35)	3500K	DA - Dali	35 - 35°	GR - Grey			
		(CT40)	4000K	AN - 0-10V					
		(CT50)	5000K						

Sample: BMTL90 - 10 - CT27 - ND - 15 - BK - HC - XX