

ATRIUM 3


ATR 3

IP20 /IP44

YYZ Atrium assure a perfectly homogeneous light distribution without dark spots, we use specially made lenses with 180° degree beam angle. This allows the light to be dispersed evenly inside the fixture and assures a shadow free appearance. These recessed ceiling panel is constructed in sheet steel housing, powder coated to matt white (RAL 9016) is suitable for Lay-in and Dampa ceilings.

FEATURES

MATERIAL	Sheet Steel
FINISH	White
RATED POWER	30/50W
WORKING VOLTAGE	200-240V AC
RADIANCE ANGLE	180°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	595mm x 595mm x 32mm , 620mm x 620mm x 32mm
OPERATIN TEMP	295mm x 1195mm x 32mm, 595mm x 1195mm x 32mm
CONTROL	-15° C - +50° C
	On/Off, Dali, Dimming, Emergency Kit

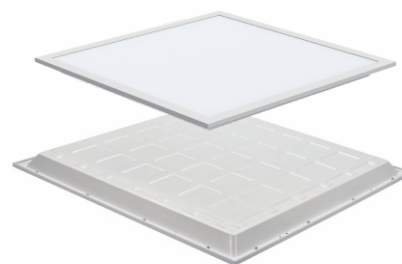

TCI / OSRAM / BRIDGELUX / TRIDONIC
LED Quality


200-240VAC
Working Voltage

30/50W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	30/50W
SUPPLY VOLTAGE	200-240V AC
COLORS	3000K/4000K/5000K, 6000K
CRI	80+
DELIVERED LUMENS	105 lumen/watt (Standard) 130 lumen/watt (Advanced)

DIMENSIONS

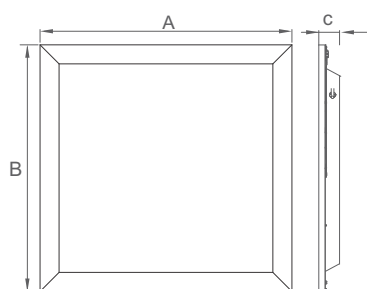

A	B	C
595	595	32
620	620	32
295	1195	32
595	1195	32

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	INPUT VOLTAGE	LUMEN	SIZE	FINISH	CONTROL	CUSTOM	
ATRIUM 3 - ATR3	30 - 30W	(CT 30)	3000K	200-240VAC	105 - 105lm	595 - 595x595	WH - White	AN - 1-10V	EMK (3H)
	50 - 50W	(CT 40)	4000K	130 - 130lm	620 - 620x620	XX - Custom	EM - Emergency Kit		
		(CT 50)	5000K	295 - 295x1195		ND - ON/OFF			
		(CT 60)	6000K	595(a) - 595x1195		DA - Dali			
		(CTXX)	CUSTOM						

Sample: ATR 3 - 30 - CT30 - 200 - 105 - 595 - WH - AN - EMK