

# SCINTILLA FLEX

## STA-R FX

**Mono** IP20 **CE**

YYZ Scintilla flex miniature recessed downlight feature scalability along with rotational and tilting flexibility. Several beam angle options tendered through anti-glare reflector makes it best suited for accent, general lighting applications.



### FEATURES

MATERIAL	Cast aluminum, PC
FINISH	White, Black
RATED POWER	5W
WORKING VOLTAGE	220-240V AC
RADIANCE ANGLE	15°, 24°, 38°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
REFLECTOR FINISH	White
DIMENSION	Ø80x123mm(Cutout Ø68mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, 1-10V, Triac
OPTIC	Anti-Glare reflector

BRIDGELUX  
LED Quality


240V AC  
Working Voltage

5W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	5W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K, 5000K
CRI	90
LUMEN	300 lm

### DIMENSIONS

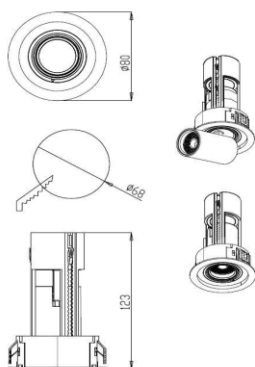

### ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE		CONTROL	FINISH	CUSTOM
STA-R FX	5 - 5W	15 - 15°	(CT27)	2700K	ND - Non Dimmable	WH - White	XX - XX
		24 - 24°	(CT30)	3000K	TR - Triac		
		38 - 38°	(CT40)	4000K	AN - 1-10V		
			(CT50)	5000K			

Sample: STA-R FX - 5 - 15 - CT27 - ND - WH - XX