

SCINTILLA FLEX

STA-R FX

Mono IP20 **CE**

YYZ Scintilla flex miniature recessed downlight feature scalability along with rotational and tilting flexibility. Several beam angle options tendered through anti-glare reflector makes it best suited for accent, general lighting applications.



FEATURES

MATERIAL	Cast aluminum, PC
TRIM FINISH	White, Black, Grey
RATED POWER	2x28/2x36W
WORKING VOLTAGE	220-240V AC
RADIANCE ANGLE	Narrow, Medium, Wide, Ultra wide
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
REFLECTOR FINISH	White
DIMENSION	Ø300x256mm(Cutout 280 x150mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, 1-10V, Triac, Dali
OPTIC	Anti-Glare reflector

CITIZEN
LED Quality


240V AC
Working Voltage

2x28/2x36W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	2x28/2x36W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 3500K, 4000K
CRI	90
LUMEN	90 lm/W

DIMENSIONS

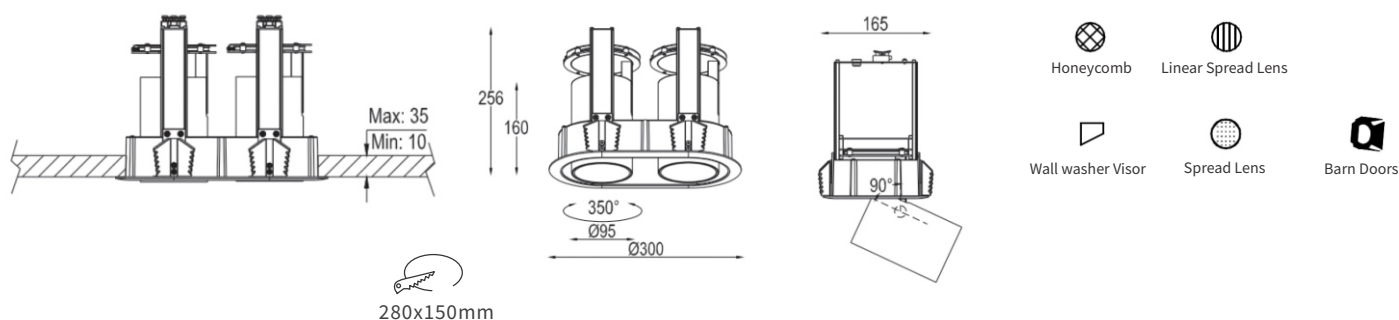

ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	DRIVER	FINISH	ACCESSORIES	CUSTOM
STA-R FX	56 - 2x28W	N - Narrow	(CT27) 2700K	700 - 700mA(28W)	WH - White	HC - Honeycomb	XX - XX
	72 - 2x36W	M - Medium	(CT30) 3000K	900 - 900mA(36W)	BK - Black	LSL - Linear Spread Lens	
		W - Wide	(CT35) 3500K		GR - Grey	WV - Wall washer Visor	
		U - Ultra Wide	(CT40) 4000K		SL - Spread Lens	BD - Barn Doors	

Sample: STA-R FX - 56 - N - CT27 - 700 - WH - HC - XX