

# OPERA ANTIGLARE ADJUSTABLE DOWN LIGHT

## OPA AGA

**Mono** IP20 **CE**

YYZ Opera antiglare downlights features glare free UGR<12 with various beam angle which is suited for general lighting. The great variety of possible light sources, even the latest generation of LED, combined with the availability of a wide range of accessories, makes this family of products particularly suitable for any type of application, from commercial premises and offices to typical residential environments or highly professional facilities such as museum exhibitions.

### FEATURES

MATERIAL	Aluminum
FINISH	White, Black
RATED POWER	7/10/15W
WORKING VOLTAGE	220-240V 50/60Hz
RADIANCE ANGLE	Narrow, Medium, Wide
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø85x85mm(Cutout Ø75mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Triac, 1-10V, Dali



- 1 LED**  
LED Quality
- 240 VOLTS**  
Working Voltage
- 7/10/15W**  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	7/10/15W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 3500K, 4000K
CRI	90+
LUMEN	90lm/W




White



Black

### DIMENSIONS

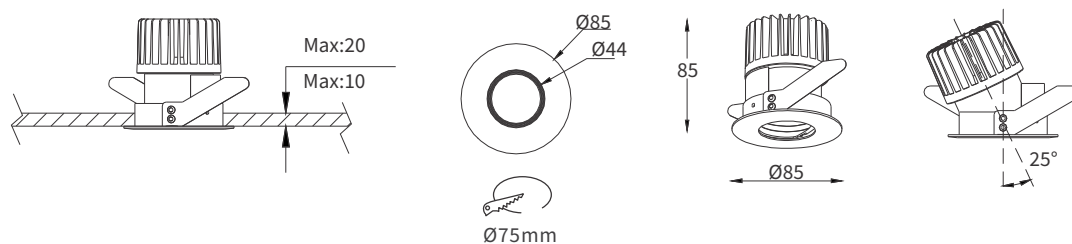

### ORDERING LOGIC

PRODUCT	CONTROL	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH	ACCESSORIES	CUSTOM
OPA AGA	ON/OFF	7 - 7W	(CT27) 2700K	240VAC	N - Narrow	BL - Black	HCL - Honey Combo Louver	xx
	TRIAC	10 - 10W	(CT30) 3000K		M - Medium	WH - White	LSL - Linear Spread Lens	
	1-10V	15 - 15W	(CT35) 3500K		W - Wide			
	DALI		(CT40) 4000K					

Sample: OPA AGA - ON/OFF - 7 - CT27 - 240 - N - BL - HCL - XX