

# OPERA ANTIGLARE ADJUSTABLE DOWN LIGHT

## OPA AGA

**Mono** IP20 **CE**

YYZ Opera antiglare downlights features glare free UGR<12 with various beam angle which is suited for general lighting. The great variety of possible light sources, even the latest generation of LED, combined with the availability of a wide range of accessories, makes this family of products particularly suitable for any type of application, from commercial premises and offices to typical residential environments or highly professional facilities such as museum exhibitions.



### FEATURES

MATERIAL	Aluminum
FINISH	White, Black
RATED POWER	7W
WORKING VOLTAGE	220-240V 50/60Hz
RADIANCE ANGLE	18°, 25°, 36°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø60 x 51mm (Cutout Ø55mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Triac, 1-10V, Dali
OPTIC	Optical PC Lens + Anti-glare reflector

BRIDGELUX  
LED Quality


240V AC  
Working Voltage

7W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	7W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K
CRI	90
LUMEN	428.1 lm

### DIMENSIONS

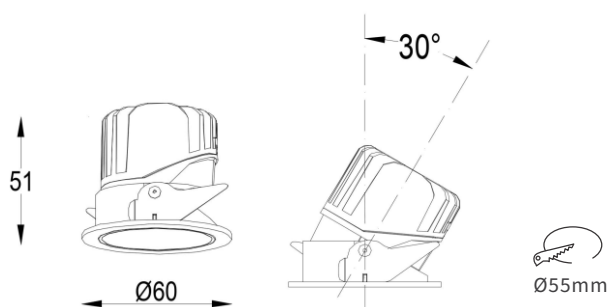


### ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	FINISH	ACCESSORIES	CUSTOM
OPA AGA	7 - 7W	18 - 18°	(CT27) 2700K	BK - Black	HCL - Honey Combo Louver	XX - Custom
		25 - 25°	(CT30) 3000K	WH - White	LSG - Linear Spread Glass	
		36 - 36°	(CT40) 4000K	XX - Custom	GG - Ground Glass	

Sample: OPA AGA - 7 - 18 - CT27 - BK - HCL - XX



Honeycomb louver



Ground Glass



Linear spread Glass