

PLATZ-PINHOLE ROUND FIXED (FLUSH-TRIMLESS)

PAZ-PH-RD-FX-FT

Mono IP20/54

YYZ Platz LED recessed downlights provides the perfect combination of efficiency, light comfort, and design, without compromising on lighting performance. It is made of die-cast aluminum coated with white electrostatic powder which provide excellent heat sink, equipped with anti-glare optical diffuser.



FEATURES

MATERIAL	Die-cast aluminum
FINISH	White, Black
RATED POWER	15W
WORKING VOLTAGE	220-240V AC
INPUT CURRENT & VOLTAGE	350mA
RADIANCE ANGLE	15°, 23°, 36°, 50°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø85x85mm(Cutout Ø75mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Triac, 1-10V, Dali

BRIDGELUX / LUMILEDS
LED Quality



240 VOLTS
Working Voltage

15W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	15W
SUPPLY VOLTAGE	220-240VAC
COLORS	2700K, 3000K, 4000K, 3000-2000K
CRI	90
LUMEN	80lm/W
IP RATE	IP20, IP44

DIMENSIONS

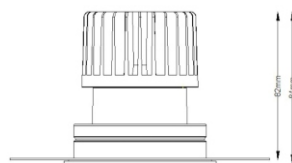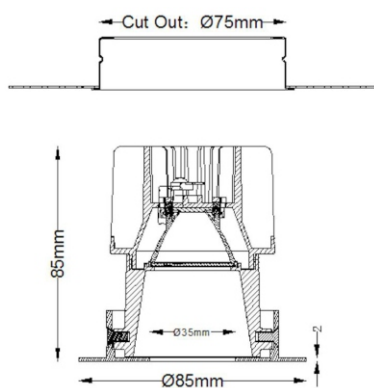

ACCESSORIES

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	IP RATING	VOLTAGE	BEAM ANGLE	FINISH	ACCESSORIES	
PAZ-PH-RD-FX-FT	15 - 15W	(CT27)	2700K	ND - ON/OFF	20 - IP20	240 - 240VAC	15 - 15°	WH - White	XX - XXX
		(CT30)	3000K	DA - DALI	54 - IP54		24 - 24°	BK - Black	
		(CT40)	4000K	AN - 1-10V			36 - 36°		
		(CTWD)	3000-2000K	TR - TRIAC			50 - 50°		

Sample: PAZ-PH-RD-FX-FT - 15 - CT27 - ND - 20 - 240 - 15 - WH - XX