

PARKING GARAGE LIGHT

PGL



YYZ Parking garage light is constructed in die-cast aluminum housing with machined light guiding lens to ensure wide distribution. This surface mounted fixtures will satisfy the needs of your parking area with increased illumination, ideal color and temperature, along with huge energy savings. These lights cast widespread, uniform light to diminish shadows and improve visibility for pedestrians and vehicles.

FEATURES

MATERIAL	Die-cast aluminum body
FINISH	White, Bronze
RATED POWER	30/45/70W
WORKING VOLTAGE	120-277VAC
LED QUANTITY	256Nos
RADIANCE ANGLE	274°
MOUNTING	Surface mounted
CONNECTION	Outdoor rated connections
LAMP LIFE	60,000 Hrs
DIMENSION	355.4x 355.4 x 109mm
OPERATING TEMP	-30° C - +50° C
STORAGE TEMP	-10° C - +60° C
CONTROL	On/Off, 0-10V, Dali
WEIGHT	4.228Kg
ACCESSORIES	Motion Sensor/ Daylight Sensor, Emergency Light




- 256 LED CREE**
LED Quality
- 120-277VAC**
Working Voltage
- 30/45/70W**
Rated power


ELECTRICAL DATA

POWER CONSUMPTION	30/45/70W
SUPPLY VOLTAGE	120-277VAC
COLORS	3000K, 4000K, 5000K
CRI	80+

DIMENSIONS

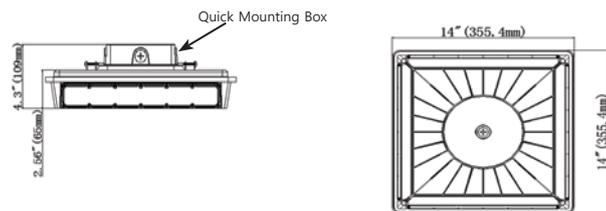

Motion Sensor Coverage

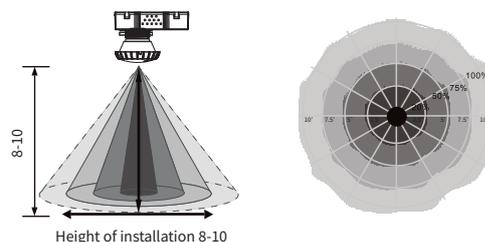

Height of installation 8-10

LUMEN OUTPUT

PGL-30	3460 lms
PGL-45	5190 lms
PGL-70	8070 lms



Trunnion Mounting Bracket (TMB) Option

ORDERING LOGIC

PRODUCT	No of LED	WATTAGE	COLOR TEMPERATURE	INPUT VOLTAGE	OPTIC	FINISH	CONTROL	ACCESSORIES
PARKING GARAGE LIGHT - (PGL)	256 - 256	30 - 30W	(CT 30)	3000K	120-277VAC	274°	BR - Bronze WH - White	MSI - Motion Sensor ELI16W - Emergency Light
		45 - 45W	(CT 40)	4000K				
		70 - 70W	(CT 50)	5000K				
			(CTXX)	CUSTOM				

Sample: PGL - 256 - 30 - CT30 - 120 - 277 - 274 - BR - ON/OFF - MSI

MSI - MOTION SENSOR INTEGRATED MICROWAVE / SINGLE CIRCUIT, 0-100% STEPS