

SURFACEMOUNTED DOWN LIGHT SERIES

SMDLCH 5710

Mono IP20 **CE**

YYZ SMDLCH is surface mounted LED downlight is with symmetric light distribution to achieve an effective task, accent or ambient lighting. These downlights are also suitable for all commercial lighting applications as well as public indoor space where there is limited space in ceiling. It is available in white and black finishes.



FEATURES

MATERIAL	Aluminum
TRIM FINISH	White, Black
RATED POWER	15W
WORKING VOLTAGE	AC 230V-50Hz
RADIANCE ANGLE	15°, 24°, 36°, 50°
MOUNTING	Surface mounted
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø90 x 135mm
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off

CREE LED Quality


AC 230V Working Voltage

15W Rated power

ELECTRICAL DATA

POWER CONSUMPTION	15W
SUPPLY VOLTAGE	AC 230V
COLORS	2700K, 3000K, 4000K
CRI	92
LUMEN	1300 lm

DIMENSIONS

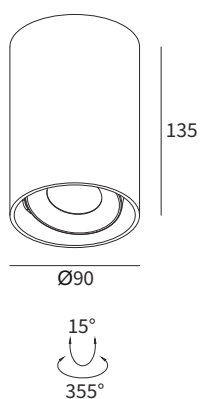

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	VOLTAGE	BEAM ANGLE	FINISH	CUSTOM		
SMDLCH 5710	15 - 15W	(CT27)	2700K	ON/OFF	AC - AC230V	15 - 15°	WH - White	xx	
		(CT30)				24 - 24°			BK - Black
		(CT40)				36 - 36°			
						55 - 55°			

Sample: SMDLCH 5710 - 15 - CT27 - ON/OFF - AC - 15 - WH - XX