

MYRIAD CEILING LIGHT

MRD SM

Mono IP20 CE

YYZ Myriad ceiling/recessed mounted cylinder features aluminum housing with 350 degree rotational flexibility and 90 degree aiming adjustability. These ceiling recessed light are designed for applications requiring accent, general lighting. It has wide range of choice like optics, RAL finishes, CCT's, Dimming options to suit various applications.



FEATURES

MATERIAL	Aluminum
TRIM FINISH	Black, Grey, White
RATED POWER	15/20W
WORKING VOLTAGE	220-240V 50/60Hz
RADIANCE ANGLE	Narrow, Medium, Wide, Ultra wide
MOUNTING	Surface mounted
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø72 x 163mm
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Triac

CITIZEN/LUMILEDS
LED Quality


240 VOLTS
Working Voltage

15/20 W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	15/20W
SUPPLY VOLTAGE	220-240VAC
COLORS	2700K, 3000K, 3500K, 4000K
CRI	90+
LUMEN	90lm/W

DIMENSIONS

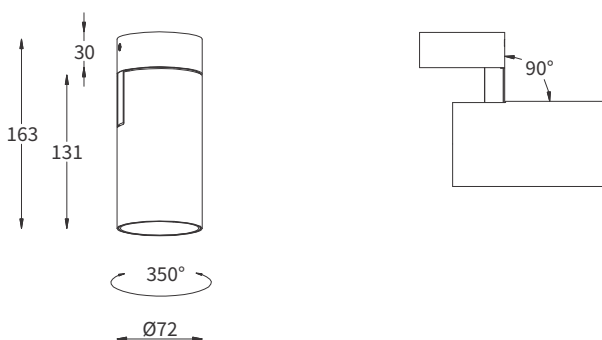

ORDERING LOGIC

PRODUCT	CONTROL	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH	ACCESSORIES
MRD SM-15	ON/OFF	15 - 15W	(CT27) 2700K	240VAC	N - Narrow	BL - Black	HCL - Honey Combo Louver
MRD SM-20	TRIAC	20 - 20W	(CT30) 3000K		M - Medium	GR - Grey	LSL - Linear Spread Lens
			(CT35) 3500K		W - Wide	WH - White	WWV - Wall Washer Visor
			(CT40) 4000K		UW - Ultra wide		SP - Spread Lens
							BD - Barn Doors

Sample: MRD SM-15 - ON/OFF - 15 - CT27 - 240 - N - BL - HCL - XX

Honeycomb
 Linear spread lens
 Wall washer visor
 Spread lens
 Barn doors