

# MYRIAD CEILING LIGHT

## MRD RM

Mono IP20 CE

YYZ Myriad ceiling/recessed mounted cylinder features aluminum housing with 350 degree rotational flexibility and 90 degree aiming adjustability. These ceiling recessed light are designed for applications requiring accent, general lighting. It has wide range of choice like optics, RAL finishes, CCT's, Dimming options to suit various applications.



### FEATURES

MATERIAL	Aluminum
TRIM FINISH	Black, Grey, White
RATED POWER	28/36W
WORKING VOLTAGE	220-240V 50/60Hz
RADIANCE ANGLE	Narrow, Medium, Wide, Ultra wide
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø90 x 204mm (Cutout Ø105mm, Height 50mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Triac, 1-10V, Dali

CITIZEN/LUMILEDS  
LED Quality


240 VOLTS  
Working Voltage

28/36 W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	28/36W
SUPPLY VOLTAGE	220-240VAC
COLORS	2700K, 3000K, 3500K, 4000K
CRI	90+
LUMEN	90lm/W

### DIMENSIONS

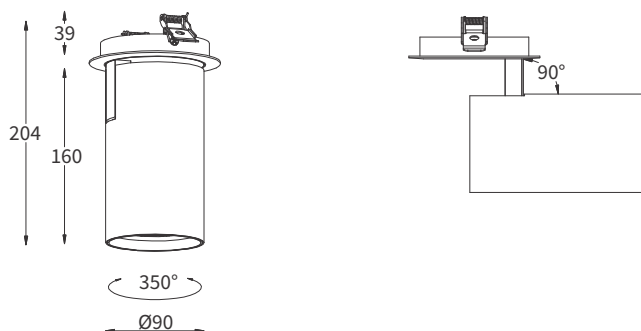

### ORDERING LOGIC

PRODUCT	CONTROL	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH	ACCESSORIES
MRD RM-28	ON/OFF	28 - 28W	(CT27) 2700K	240VAC	N - Narrow	BL - Black	HCL - Honey Combo Louver
MRD RM-36	TRIAC	36 - 36W	(CT30) 3000K		M - Medium	GR - Grey	LSL - Linear Spread Lens
	1-10V		(CT35) 3500K		W - Wide	WH - White	WWV - Wall Washer Visor
	DALI		(CT40) 4000K		UW - Ultra wide		SP - Spread Lens
							BD - Barn Doors

Sample: MRD RM-28 - ON/OFF - 28 - CT27 - 240 - N - BL - HCL - XX

Honeycomb 
 Linear spread lens 
 Wall washer visor 
 Spread lens 
 Barn doors