


LINEAR PROJECTOR

LP SERIES



YYZ Linear projector series is a new solution for high brightness architectural outdoor illumination. It is made of varnished and anodized aluminum body, with stainless steel kicker baffle blades. The body of the fixture is adjustable and can be installed away from the mounting surface by tilting the brackets. The linear projector available in 480mm, 960mm & 1620mm lengths and can be customized as per project situation. This fixture is IP65-rated, UV resistant and designed to withstand outdoor element.

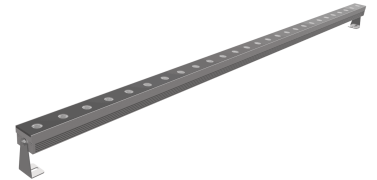

FEATURES


MATERIAL	Anodized aluminum
FINISH	Grey-RAL 9006/Custom
RATED POWER	0.1/0.3/1/3W per LED
WORKING VOLTAGE	230 V
LED QUANTITY	8Led(480mm), 16Led(960mm), 27Led(1620mm)
RADIANCE ANGLE	10°x41°
MOUNTING	Surface mounted
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	480/960/1620(L) x 50(W)
AVAILABLE LENGTH	480mm, 960mm, 1620mm
WEIGHT	3kg(480mm) / 5kg(960mm) / 8kg(1620mm)
OPERATING TEMP	-10° C - +50° C
STORAGE TEMP	-20° C - +60° C
CONTROL	On/Off
OPTIC	Tempered glass



ELECTRICAL DATA

POWER CONSUMPTION	0.1/0.3/1/3W
SUPPLY VOLTAGE	230 V
COLORS	2700K, 3000K, 3200K, 4200K, 5000K
CRI	80+
LUMEN	50lm-5832lm

DIMENSION

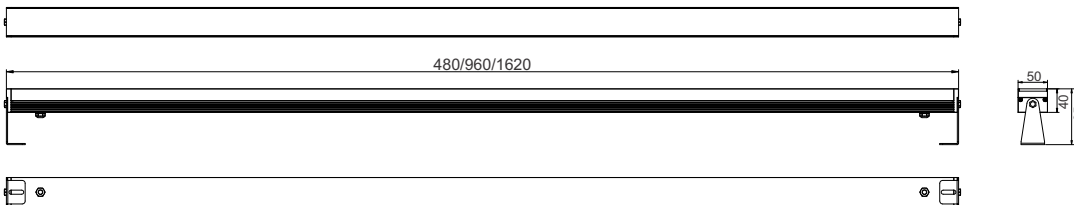

LP SERIES

ORDERING LOGIC

PRODUCT SERIES	MODEL	INPUT	COLOR TEMPERATURE	OPTICS	LED POWER	FINISH	WIRING	ACCESSORIES
LP - Linear Projector	M - 480mm(8LED) L - 960mm(16 LED) X - 1620mm(27 LED)	AC - 230Vac	(CT27) 2700K (CT30) 3000K (CT40) 4000K (CT50) 5000K (####) CUSTOM	EB - 10 X 41 (Elliptical)	0.1 - 0.1W/LED 0.3 - 0.3W/LED 1 - 1W/LED 3 - 3W/LED	GR - Grey-RAL 9006 xx - Custom	M - 2 Connectors T - 1 Connect I - 1 Pigtail + 1 Connector	GB - Glare Bales

Sample: LP-M-AC-CTXX-EB-0.1-GR-M-GB

MODEL	NO. OF LED	LED WATTAGE	DRIVING CURRENT	LUMEN
M - 480 mm	8	0.1	60mA	130
	8	0.3	100mA	290
	8	1	350mA	960
L - 960 mm	16	0.1	60mA	250
	16	0.3	100mA	575
	16	1	350mA	1920
	16	3	700mA	3456
X -1620 mm	27	0.1	60mA	420
	27	0.3	100mA	970
	27	1	350mA	3240
	27	3	700mA	5832

