

LINEAR RECESSED OUTDOOR

LRO-24



YYZ LRO series is the linear recessed fixture build in constant current drive and 485 control module inside rendering it a reliable solution for interactive function between person and light. This IP67 rated fixture has carefully designed embedded parts and is easy to install. It has waterproof design and matching degassing valve make it suitable for application in areas like public square, park, stage, garden etc.



FEATURES


LED QUANTITY	24Led/mtr
FINISH	6063-T5 Aluminum
WORKING VOLTAGE	24 Vdc
RATED POWER	24W/mtr
BEAM ANGLE	8°x8°, 15°x15°, 30°x30°, 45°x45°, 60°x60°, 9°x50°, 10°x60°
DELIVERED OUTPUT	118lm @ 4000K
AVAILABLE LENGTH	500mm, 1000mm
MOUNTING	Recessed
OPTIC	Tempered glass
DIMENSIONS	500/1000(L) x 52(W)
OPERATION TEMP	-5° C - +50° C
STORAGE TEMP	-20° C - +60° C
WEIGHT	3.70kg/mtr
LAMP LIFE	50000 hrs
BODY COLOR	Black, Grey, Custom
CONTROL	On/Off, Dali, 1-10V

- 24 LEDs / mtr
LED Quality
- 24 VOLTS
Working Voltage
- 24 W / mtr
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	24W/ mtr
SUPPLY VOLTAGE	24 DC V
COLORS	2700K, 3000K, 4000K
CRI	80+
LEDS / 3.3FT	24 Leds
LUMEN	118lm/W @ 4000K

DIMENSION

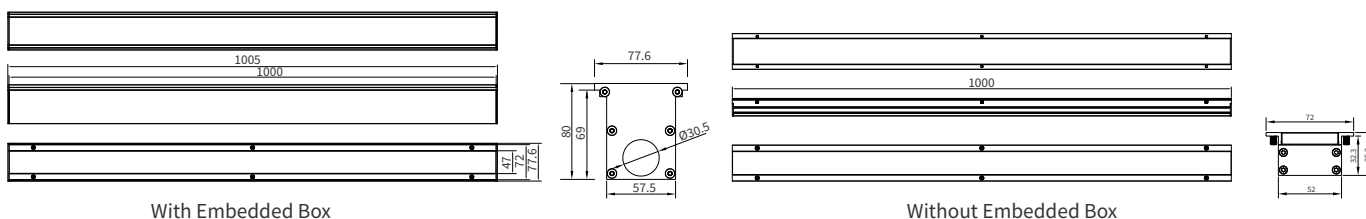

ORDERING LOGIC

PRODUCT	OPTIC	COLOR TEMPARTURE	VOLTAGE	FIXTURE LENGTH	BODY COLOR	CUSTOM
LRO24	8	- 8° x 8° (CT27)	24 - 24VDC	500 - 500mm (12 LEDES)	BK - BLACK	XX
	15	- 5° x 15° (CT30)		1000 - 1000mm (24LEDES)	GR - GREY	
	30	- 30° x 30° (CT40)		XX - CUSTOM	XX - CUSTOM	
	45	- 45° x 45° (CTXX)		CUSTOM		
	60	- 60° x 60°				
	9x50	- 9° x 50°				
	10x60	- 10° x 60°				
	XX	- CUSTOM				

Sample: LRO24 - 8 - CT 27 - 24 - 500 - BK - XX