

DIMPLE WALL GRAZE


DPL WGDI



YYZ Dimple wall graze is a direct/indirect wall mounted luminaire designed with a minimalist profile make it an elegant solution for wall grazing applications. It is made from 100% recyclable, extruded architectural grade T6061 aluminum. It is available in various lengths, voltages, color temperature, CRI and hence making it ideal for commercial and residential indoor lighting applications.

FEATURES


HOUSING	100% Recyclable, extruded architectural grade t6061 aluminium
FINISH	Aluminium, Black, White, Ral, Bronze powdercoat
WORKING VOLTAGE	24Vdc
RATED POWER	12/13.4/25W/mtr
BEAM ANGLE	135°
MOUNTING	Wall mounted
OPTIC	Opal diffuser
DIMENSIONS	42 x 102 mm
OPERATION TEMP	-20° C - +40° C
LAMP LIFE	50,000 hrs
AVAILABLE LENGTH	600, 1200, 1800, 2400, 3000, 3400, 4500, 5000mm
CONTROL	0-10V, 1-10V, Dali, Dmx, Non dimmable, Phase dim

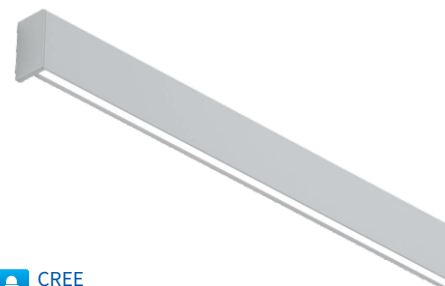

ELECTRICAL DATA

POWER CONSUMPTION	12/13.4/25W/mtr
SUPPLY VOLTAGE	24 Vdc
COLORS	2700K, 3000K, 3500k, 4000K, 5000K, 6500K
CRI	80+
LUMEN	70lm/W

DIMENSION



ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	FINISH	LUMEN	OPTIONS
DPL WGDI	12 - 12W/Mtr	(CT27) 2700K	0-10V	AL - Aluminium natural	M - Minium 1548lm/m	EM - 3 Hour Emergency Kit-Remote PIR-A - PIR Absence Detector - remote PIR-P - PIR Presence Detector - remote DPIR - DALI PIR Sensor
	13.4 - 13.4W/Mtr	(CT30) 3000K	1-10V	BK - Black powder coat	ML - Minium Low 1882lm/m	
	25 - 25W/Mtr	(CT35) 3500K	DALI	WH - White powder coat	MM - Minium Medium 2933lm/m	
		(CT40) 4000K	NON DIM	RAL - RAL powder coat	LM - Low Minium 1882lm/m	
		(CT50) 5000K	DMX	BR - Bronze powder coat	L - Low 2216lm/m	
		(CT65) 6500K	PHASE DIM	LME - Low Medium 3267lm/m		
		(CTXX) CUSTOM		MEM - Medium Minium 2933lm/m		
				MEL - Medium Low 3267lm/m		
			ME - Medium 4318lm/m			
			RGBW - RGBW 522lm/m(white only)			

Sample: DPLWGDI - 12 - CT 27 - 0-10V - AL - M - EM