

# DIMPLE WALL GRAZE


## DPL WG



YYZ Dimple wall graze is a direct/indirect wall mounted luminaire designed with a minimalist profile make it an elegant solution for wall grazing applications. It is made from 100% recyclable, extruded architectural grade T6061 aluminum. It is available in various lengths, voltages, color temperature, CRI and hence making it ideal for commercial and residential indoor lighting applications.

### FEATURES


HOUSING	100% Recyclable, extruded architectural grade t6061 aluminium
FINISH	Aluminium, Black, White, Ral, Bronze powdercoat
RATED POWER	12/13.4/25W/mtr
BEAM ANGLE	135°
MOUNTING	Wall mounted
OPTIC	Opal diffuser
DIMENSIONS	42 x 75 mm
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 HRS
AVAILABLE LENGTH	600, 1200, 1800, 2400, 3000, 3400, 4500, 5000mm
CONTROL	0-10V, 1-10V, Dali, Dmx, Non dimmable, Phase dim

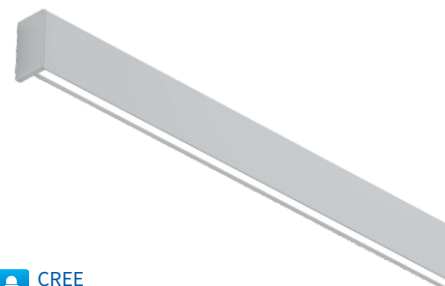

### ELECTRICAL DATA

POWER CONSUMPTION	12W(774lm/m), 13.4W(1108lm/m), 25W(2159lm/m), RGBW 261lm/m (white only)
SUPPLY VOLTAGE	24 Vdc
COLORS	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	80+
LUMEN	70lm/W

### DIMENSION



### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	FINISH	OPTIONS
DPL WG	12 - 12W/Mtr	(CT27) 2700K	0-10V	AL - Aluminium natural	EM - 3 Hour Emergency Kit-Remote
	13.4 - 13.4W/Mtr	(CT30) 3000K	1-10V	BK - Black powder coat	PIR-A - PIR Absence Detector - remote
		(CT35) 3500K	DALI	WH - White powder coat	PIR-P - PIR Presence Detector - remote
	25 - 25W/Mtr	(CT40) 4000K	NON DIM	RAL - RAL powder coat	
		(CT50) 5000K	DMX	BR - Bronze powder coat	
		(CT65) 6500K	PHASE DIM		
		(RGBW) RGBW			
		(CTXX) CUSTOM			

Sample: DPLWG - 12 - CT 27 - 0-10V - AL - EM