

APERTURE RECESSED-0


APRTO

Mono IP20 CE

YYZ Aperture is recessed architectural luminaire with housing in 100% recyclable, extruded architectural grade T6061 aluminum. It is equipped with high power LED light source and optical lens with a wide range of color temperature which provide superior color consistency and high CRI. This IP20 rated luminaire is with standard opal white or microprismatic lens diffuser

FEATURES

HOUSING	100% Recyclable, extruded architectural grade t6061 aluminium
BEAM ANGLE	120°
MOUNTING	Recessed
OPTIC	Opal frosted, Prismatic lens (Low UGR)
DIMENSIONS	44mm x 49mm
OPERATION TEMP	-20° C - +40° C
LAMP LIFE	50,000 hrs
AVAILABLE LENGTH	650mm, 1000mm, 1500mm(Can be joined end-to-end), Custom shapes-minium diameter to 600mm
CONTROL	On/Off, Dali, 0-10V, Dmx

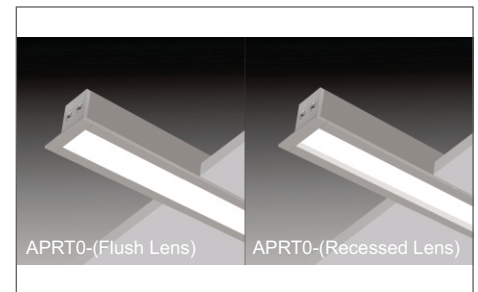


CREE/SAMSUNG
LED Quality

240V AC
Working Voltage



30W/Mtr
Rated power



DIMENSION



APRTO (FLUSH LENS)



APRTO (RECESSED LENS)

ORDERING LOGIC

PRODUCT	WATTAGE	CRI	COLOR TEMPERATURE	DRIVER	LENS	FIXTURE LENGTH	FINISH	
APRTO	30 - 30W/Mtr	80	(CT27)	2700K	ON-OFF	FL - Flush Lens	650 - 650mm	AL - Aluminium natural
		90	(CT30)	3000K	0-10V	RL - Recessed Lens	1000 - 1000mm	BK - Black powder coat
			(CT35)	3500K	DALI	1500 - 1500mm	WH - White powder coat	
			(CT40)	4000K	DMX	CL - Custom Length	BR - Bronze	
			(CT50)	5000K	CS - Custom Shape	XX - Custom		
			(CT60)	6000K				
			(RGBW)	RGBW				
			(CTXX)	Custom				

Sample: APRTO - 30 - 80 - CT27 - ON-OFF - FL - 650 - AL

STANDARD SHAPES AND SIZES

APRTO-Linear Lengths	:	585, 1146, 1707, 2268, 2837, 3398, 3959, 4520, 5081mm
APRTO-Square Lengths	:	579x617, 1140x1739, 2262x2300, 2823x2861, 3384x3422, 3945x3983mm
	:	585x623, 1146x1184, 1707x1745, 2268x2306, 2889x2867, 3390x3428, 3951x3989mm
APRTO-Rectangle Lengths	:	579x1178, 579x1739, 579x2300, 1140x1739, 1140x2300, 1140x2861mm
	:	585x1184, 585x1745, 585x2306, 1146x1745, 1146x2306, 1146x2867mm
APRTO Base Linear Lengths (No end caps)	:	561, 1122, 1683, 2244mm
APRTO 90° Angle (No end caps)	:	570x589, 573x592mm

LUMINAIRE LUMEN

12W/M - 701lm/M
13.4W/M - 1002lm/M
25W/M - 1954lm/M
RGBW -236lm/M(white only)