

APERTURE -1


APR1 & APR1T

Mono IP20 CE

YYZ Aperture is recessed architectural luminaire with housing in 100% recyclable, extruded architectural grade T6061 aluminum. It is equipped with high power LED light source and optical lens with a wide range of color temperature which provide superior color consistency and high CRI. This IP20 rated luminaire is with standard opal white or microprismatic lens diffuser.




FEATURES

HOUSING	100% Recyclable, extruded architectural grade t6061 aluminium
BEAM ANGLE	120°
MOUNTING	Recessed
OPTIC	Opal frosted, Prismatic lens (Low UGR)
DIMENSIONS	167mm x 83mm, 96mm x 83mm
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 hrs
AVAILABLE LENGTH	650mm, 1000mm, 1500mm (Can be joined end-to-end)
CONTROL	On/Off, Dali, 0-10V, Dmx

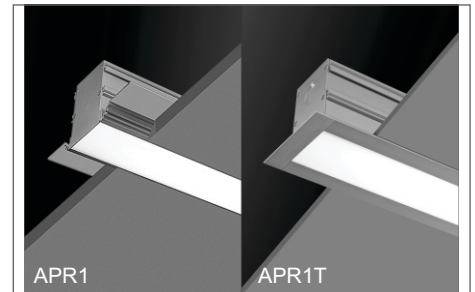

- CREE/SAMSUNG LED Quality
- 240V AC Working Voltage
- 25W/Mtr Rated power

DIMENSION



APR1 (CEILING RECESSED- TRIMLESS)

APR1T (CEILING RECESSED- WITH TRIM)

ORDERING LOGIC

PRODUCT	WATTAGE	CRI	COLOR TEMPERATURE	DRIVER	VOLTAGE	FIXTURE LENGTH	FINISH
APR1	12 - 12W/Mtr	80	(CT27) 2700K	ON-OFF	220-240 VAC	650 - 650mm	AL - Aluminium natural
APR1T	13.4 - 13.4W/Mtr	90	(CT30) 3000K	0-10V	220-240 VAC	1000 - 1000mm	BK - Black powder coat
	14 - 14W/Mtr		(CT35) 3500K	DALI		1500 - 1500mm	WH - White powder coat
	22 - 22W/Mtr		(CT40) 4000K	DMX		XX - CUSTOM	BR - Bronze
	25 - 25W/Mtr		(CT50) 5000K				XX - Custom
	44 - 44W/Mtr		(CT60) 6000K				
	68.8 - 68.8W/Mtr		(CTXX) Custom				
	RGBW - RGBW						

Sample: APR1 - 12 - 80 - CT27 - ON-OFF - 220 - 650 - AL

STANDARD SHAPES AND SIZES

APR1-Linear Lengths (Trimless)	:	567, 1136, 1697, 2258, 2819, 3380, 3941, 4503, 5063mm
APR1T (With Trim)	:	611, 1172, 1733, 2294, 2855, 3416, 3977, 4538, 5099mm
APR1-Square Lengths (Trimless)	:	639x639, 1200x1200, 1761x1761, 2322x2322, 2883x2883, 3444x3444, 4005x4005mm
APR1T Square Lengths (With Trim)	:	677x677, 1238x1238, 1799x1799, 2360x2360, 2921x2921, 3482x3482, 4043x4043mm
APR1-Rectangle Lengths (Trimless)	:	639x1200, 639x1761, 639x2322, 1190x1761, 1190x2322, 1190x2883mm
APR1T Rectangle Lengths (With Trim)	:	677x1238, 677x1799, 677x2360, 1238x1799, 1238x2360, 1238x2921mm
APR1 & APR1T Base Linear Lengths (No end caps)	:	561, 1122, 1683, 2244mm
APR1 (Trimless) 90° Angle (No end caps)	:	600x600mm
APR2T (With trim) 90° Angle (No end caps)	:	619x619mm

LUMINAIRE LUMEN

12W/M - 968lm/M
13.4W/M - 1385lm/M
25W/M - 2700lm/M
44.6W/M - 4461lm/M
14W/M - 1112lm/M (Tunable Low Output)
22W/M - 1575lm/M (Tunable Medium Output)
RGBW -327lm/M(white only)