


APERTURE-3 APR3 & APR3T

Mono IP20 CE

YYZ Aperture is recessed architectural luminaire with housing in 100% recyclable, extruded architectural grade T6061 aluminum. It is equipped with high power LED light source and optical lens with a wide range of color temperature which provide superior color consistency and high CRI. This IP20 rated luminaire is with standard opal white or microprismatic lens diffuser.



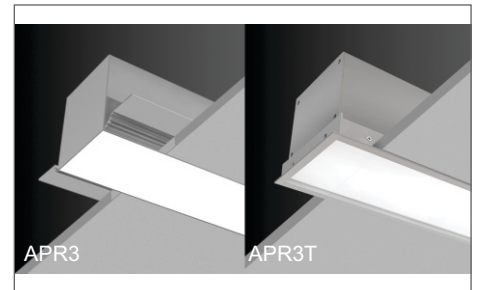


FEATURES

HOUSING	100% Recyclable, extruded architectural grade t6061 aluminium
BEAM ANGLE	120°
MOUNTING	Recessed
OPTIC	Opal frosted, Prismatic lens (Low UGR)
DIMENSIONS	152mm x 153mm, 192mm x 153mm
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 hrs
AVAILABLE LENGTH	650mm, 1000mm, 1500mm (Can be joined end-to-end)
CONTROL	On/Off, Dali, 0-10V, Dmx

- CREE/SAMSUNG LED Quality
- 240V AC Working Voltage
- 25W/Mtr Rated power

DIMENSION



APR3 (CEILING RECESSED- TRIMLESS)

APR3T (CEILING RECESSED- WITH TRIM)

ORDERING LOGIC

PRODUCT	WATTAGE	CRI	COLOR TEMPERATURE	DRIVER	VOLTAGE	FIXTURE LENGTH	FINISH
APR3	12 - 12W/Mtr	80	(CT27) 2700K	ON-OFF	220-240 VAC	650 - 650mm	AL - Aluminium natural
APR3T	13.4 - 13.4W/Mtr	90	(CT30) 3000K	0-10V			1000 - 1000mm
	14 - 14W/Mtr		(CT35) 3500K	DALI		1500 - 1500mm	WH - White powder coat
	22 - 22W/Mtr		(CT40) 4000K	DMX		XX - CUSTOM	BR - Bronze
	25 - 25W/Mtr		(CT50) 5000K				XX - Custom
	44.6 - 44.6W/Mtr		(CT60) 6000K				
	68.8 - 68.8W/Mtr		(CTXX) Custom				
	RGBW - RGBW						

Sample: APR3 - 12 - 80 - CT27 - ON-OFF - 220 - 650 - AL

APERTURE-3 APR3 & APR3T

STANDARD SHAPES AND SIZES

APR3-Linear Lengths (Trimless)	:	577, 1138, 1699, 2260, 2821, 3382, 3943, 4504, 5065mm
APR3T (With Trim)	:	609, 1170, 1731, 2292, 2853, 3414, 3974, 4536, 5097mm

LUMINAIRE LUMEN

12W/M - 902lm/M

13.4W/M - 1290lm/M

25W/M - 2514lm/M

44.6W/M - 4154lm/M

68.8W/M - 4650lm/M

14W/M - 1036lm/M (Tunable Low Output)

22W/M - 1467lm/M (Tunable Medium Output)

RGBW -304lm/M(white only)