

# CIANA 25 SERIES

## CNA25

Mono IP20 CE

YYZ Ciana IP20 is a compact and streamlined luminaire that provides direct or indirect illumination from a suspended or surface mounted channel. The fixture is available with several LED lamping options including multiple outputs and CCTs, tunable white and colour changing RGB+White. These are mainly ideal for areas like office lighting, conference rooms, commercial and residential interior lighting.

### FRAME

- CNA25SP : For suspended
- CNA25W : For wall
- CNA25SM : For surface mounted

### DRIVER


- NONDIM - Non-dimmable
- DALI - DALI dimming
- 1-10V - 1-10V dimming

### LENS

- FLAT : Flat Lens
- DROP : Drop Lens

### FINISH

- AL - Anodised aluminium (standard)
- BK - Black (RAL 9005)
- WH - White (RAL 9010)
- BZ - Bronze
- GO - Gold
- MC - Mirror Chrome
- CH - Charcoal
- BA - Brushed Aluminum
- BV - Brushed Brass Veneer
- RV - Rust Effect Veneer
- RAL/ - Custom RAL color powder coat (ex : #RAL/3003)

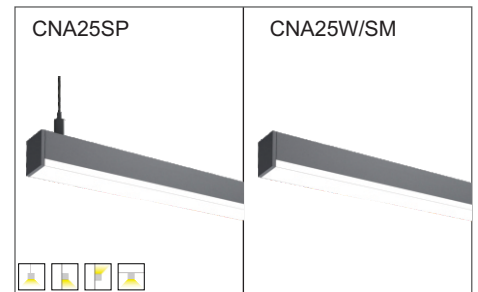

### DIRECT LINEAR LAMPING, LENGTH & LENS


OUTPUT	CRI	CCT	LENGTHS	LENS	LUMEN
MIN-12W/m	80	2700K	0.6m	Drop Lens	MIN-755lm /m
LOW-13.4W/m	90	3000K	1.2m	Flat Lens	LOW-1080lm/m
MED-25W/m		3500K	1.8m		MED-2105lm/m
RGBW		4000K	2.4m		RGBW-255lm (white only)
		5000K	3.0m		
		6500K	3.4m		
			4.5m		
			5.0m		

## CNA25

### CANOPY

- STD - Standard canopy and separate suspension
- SMALL - Small canopy and separate suspension
- COMBO - Combo suspension canopy

### DIMENSIONS

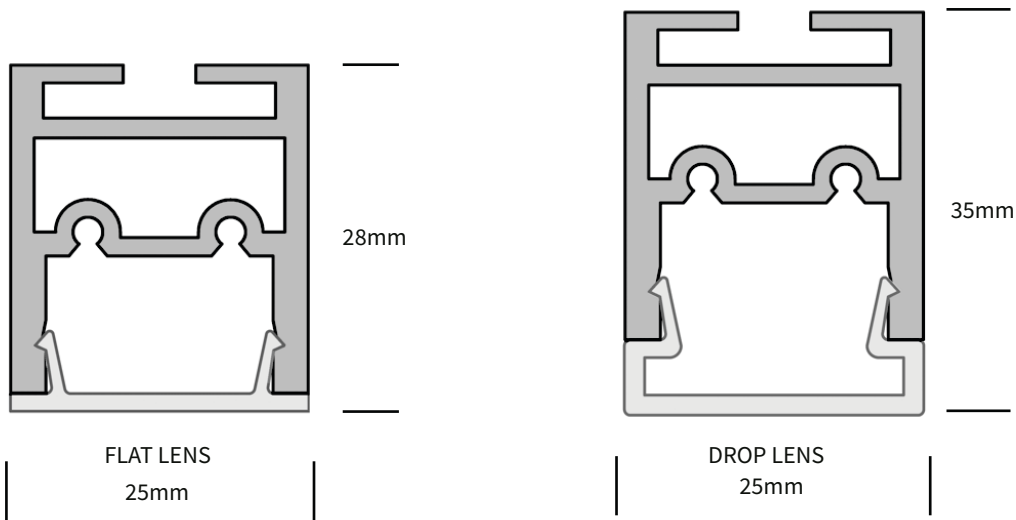

### SUSPENSION MOUNTING CANOPY OPTIONS

Standard (STD) comprises separate 115 mm powerfeed canopy and cable bullet at powerfeed locations. SMALL comprises separate 85 mm powerfeed canopy and cable bullet at powerfeed locations. COMBO comprises combined 115mm canopy (canopy and cable bullet) at powerfeed locations. All options include cable bullets for non-powerfeed locations.

