


TTC

Mono IP20 CE

YYZ Tectonic is a suspended, surface mounted luminaire that creates an architectural design with a wide swath of direct ambient light and features three-side illumination from a 108mm lensed channel. These are extremely efficient fixture with white opal, acrylic lens diffuser. It offers a wide range of color temperature ranging from 2700-6500K, tunable white and RGBW.

FEATURES

HOUSING	100% Recyclable, extruded architectural grade t6061 aluminium
RATED POWER	13.4/14/22/25/44.6W/mtr
BEAM ANGLE	120°
MOUNTING	Suspended/ Surface mount
OPTIC	Opal diffuser
DIMENSIONS	108 x 89 mm
OPERATION TEMP	-20° C - +40° C
LAMP LIFE	50,000 hrs
AVAILABLE LENGTH	600, 1200, 1800, 2400, 3000, 3400, 4500, 5000MM
CONTROL	0-10V, 1-10V, Dali, Dmx, Non dimmable, Phase dim

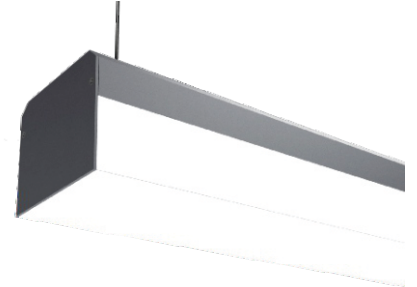

CREE
LED Quality


240V AC
Working Voltage

13.4/14/22/25/44.6W/Mtr
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	Low-13.4(1366lm/m), Medium-14W(2662lm/m), High-22W(4398lm/m), 25W(1188lm/m), 44.6W(1682lm/m), RGBW(349lm/m)
SUPPLY VOLTAGE	220-240 Vac
COLORS	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	80+/90+

DIMENSION



ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	FINISH	OPTIONS
TTC - SP	13.4 - 13.4W/Mtr	(CT27) 2700K	0-10V	AL - Aluminium natural	EM - 3 Hour Emergency Kit-Remote
TTC - SM	14 - 14W/Mtr	(CT30) 3000K	1-10V	BK - Black powder coat	PIR-A - PIR Absence Detector - remote
	22 - 22W/Mtr	(CT35) 3500K	DALI	WH - White powder coat	PIR-P - PIR Presence Detector - remote
	25 - 25W/Mtr	(CT40) 4000K	NON DIM	RAL - RAL powder coat	DPIR - DALI PIR Sensor
	44.6 - 44.6W/Mtr	(CT50) 5000K	DMX	BR - Bronze powder coat	(XX) - Custom
		(CT65) 6500K			
		(CTXX) Custom			

Sample: TTC-SP - 13.4 - CT 27 - 0-10V - AL - EM

MOUNTING OPTIONS



SUSPENSION HARDWARE

- STD : Standard separate 115mm diameter power canopy and suspension
- COMBO : 115mm diameter canopy and suspension are combined
- SMALL : 82mm diameter small separate power canopy and suspension



STD



COMBO



SMALL