

# GREY LUX


## GL-S / GL-SM

Mono IP20 CE

YYZ Grey lux is a suspended architectural luminaire with 100% recyclable, extruded aluminum in architectural grade made with standard white satin lens diffuser. It offers direct and indirect illumination which helps in delivering a versatile lighting solution for a wide range of commercial and retail application. The dramatic circular profile incorporates direct and indirect lighting which enhances the interior environment and creates an elegant effect within the space.

### FEATURES

FINISH	Silver, White, Black
WORKING VOLTAGE	100-240V 50/60Hz
RATED POWER	47/101/178W
RADIANCE ANGLE	120°
LAMP LIFE	50,000 hrs
MOUNTING	Surface / Suspended mounting
CONNECTION	Indoor rated connections
DIMENSIONS	Ø600, 900, 1200 x 60mm
OPERATION TEMP	-20° C ~ +50° C
CONTROL	On/Off, Triac, 1-10V,

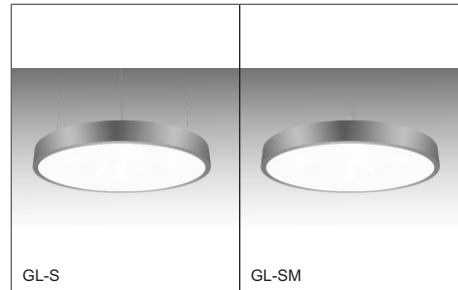

CITIZEN  
LED Quality




240 VOLTS  
Working Voltage

47/101/178W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	47/101/178W
SUPPLY VOLTAGE	100-240V ac
COLORS	3000K, 4000K, 5000K
CRI	90
LUMEN	103 lm/W @4000K(47W), 79 lm/W @4000K(101W), 95 lm/W @4000K(178W)

### DIMENSIONS

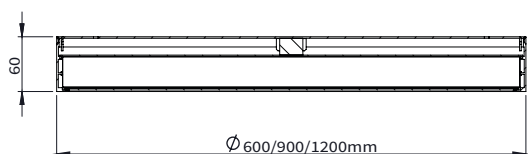

### ORDERING LOGIC

PRODUCT	SIZE	WATTAGE	COLOR TEMPERATURE	CONTROL	VOLTAGE	BEAM ANGLE	FINISH	ACCESSORIES
GL-S	600 - Ø600mm	47 - 47W	(CT30) 3000K	ND - Non Dimmable	240VAC	120- 120°	WH - White	XXX
GL-SM	900 - Ø900mm	101 - 101W	(CT40) 4000K	DA - Dali			BK - Black	
	1200 - Ø1200mm	178 - 178W	(CT50) 5000K	AN - 1-10V				

Sample: GL-S - 600 - 47 - CT30 - ND - 240 - 120 - SL - XX