

RECESSED LINEAR DOWNLIGHT- TRIM


LRD TRIM-8-N-CT27-ND-BK-H-XX



YYZ Linear Recessed downlight are rectangular shaped luminaire which provides two different light distribution options to lighting designs, flexible lighting solution with high illumination and visual comfort. Linear light is an ideal solution for high requirements of glare control which can be applied in offices, public area, commercial area, restaurants, and other applications.

FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	8/11 W
WORKING VOLTAGE	AC220 - 240 V 50/60Hz
RATED CURRENT	180 mA / 250 mA
NO OF LED	3 LED
RADIANCE ANGLE	Narrow, Medium, Wide, Ovel Flood
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	35000 - 50000 hrs
DIMENSION	119x61x97mm(cutout110x50mm)
OPERATIN TEMP	-20° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Triac





BRIDGELUX
LED Quality

AC 220-240V
Working Current

8/11W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	8/11 W
SUPPLY VOLTAGE	AC220 - 240 V 50/60Hz
COLORS	2700K / 3000K / 4000K
CRI	90



Regular
Darklight

Optional
Black


Oval Flood



Downlights



DIMENSION

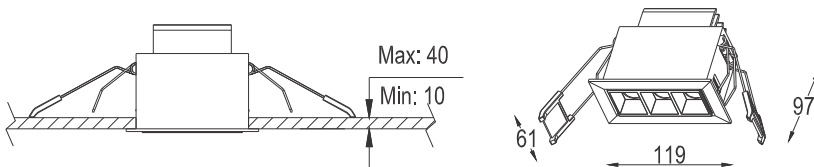

L110*W50*H140mm

Max:40mm

ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	CONTROL	FINISH	CRI	CUSTOM
LRD TRIM	8 - 8W	N - Narrow	(CT27) 2700K	ND - ON/OFF	BK - Black	H - High(90)	XX - XXX
	11 - 11W	M - Medium	(CT30) 3000K	TR - TRIAC	WH - White		
		W - Wide	(CT40) 4000K	AN - 1-10V			
		O - Ovel Flood		DA - DALI			

Sample:LRD TRIM - 8 - N - CT27 - ND - BK - H - XX