

RECESSED LINEAR DOWNLIGHT- TRIM

LRD TRIM-28-N-CT27-ND-BK-H-XX



YYZ Linear Recessed downlight are rectangular shaped luminaire which provides two different light distribution options to lighting designs, flexible lighting solution with high illumination and visual comfort. Linear light is an ideal solution for high requirements of glare control which can be applied in offices, public area, commercial area, restaurants, and other applications.

FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	28/36/43 W
WORKING VOLTAGE	AC220 - 240 V 50/60Hz
RATED CURRENT	700 mA / 900 mA / 1050 mA
NO OF LED	12 LED
RADIANCE ANGLE	Narrow, Medium, Wide, Oval Flood
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	35000 - 50000 hrs
DIMENSION	389x61x97mm(cutout380x50mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Triac




BRIDGELUX
LED Quality

AC 220-240V
Working Current

28/36/43W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	8/11 W
SUPPLY VOLTAGE	AC220 - 240 V 50/60Hz
COLORS	2700K / 3000K / 4000K
CRI	90+
LUMEN	82lm/W



Regular
Darklight

Optional
Black


Oval Flood




Downlights



DIMENSION

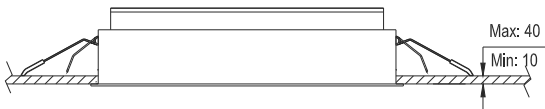

L380*W50*H140mm
 Max:40mm

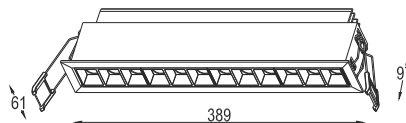

ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	CONTROL	FINISH	CRI	CUSTOM
LRD TRIM	28 - 28W	N - Narrow	(CT27) 2700K	ND - ON/OFF	BK - Black	H - High(90)	XX - XXX
	36 - 36W	M - Medium	(CT30) 3000K	TR - TRIAC	WH - White		
	43 - 43W	W - Wide	(CT40) 4000K	AN - 1-10V			
		O - Oval Flood		DA - DALI			

Sample: LRD TRIM - 28 - N - CT27 - ND - BK - H - XX