

RECESSED LINEAR WALLWASHER- TRIM

LRW TRIM-28-A-CT27-ND-BK-H-XX



YYZ Linear Recessed wallwasher gives architects and lighting designers creative design and abundant light environment. It has two options of installation, recessed and trimless mounted. Trimless design make ceiling integrated in high-quality application. In the aspect of optical, symmetrical, and asymmetrical lighting distribution apply to a variety of application. Linear light an ideal solution for high requirements of glare control for office project (UGR12), specially designed asymmetrical lighting distribution for wall washing effect apply to hotels, restaurants, public facilities, and office, etc.



FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	28/36/43 W
WORKING VOLTAGE	AC220 - 240 V 50/60Hz
RATED CURRENT	700 mA / 900 mA / 1050 mA
NO OF LED	12 LED
RADIANCE ANGLE	Assymetric
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	35000 - 50000 hrs
DIMENSION	389x61x99mm(cutout380x50mm)
OPERATIN TEMP	-20° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Triac

BRIDGELUX
LED Quality

AC 220-240V
Working Current



28/36/43W
Rated power



ELECTRICAL DATA

POWER CONSUMPTION	8/11 W
SUPPLY VOLTAGE	AC220 - 240 V 50/60Hz
COLORS	2700K / 3000K / 4000K
CRI	90+
LUMEN	82lm/W

DIMENSION

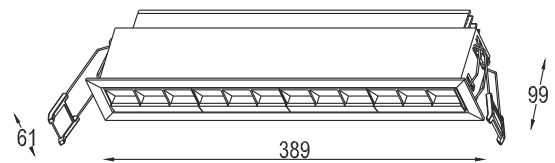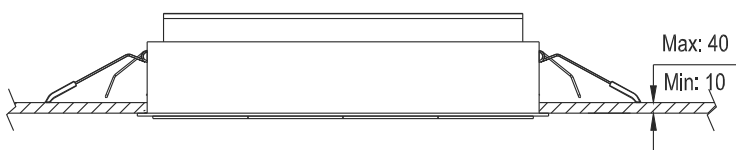

L380*W50*H140mm

Max:40mm

ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	CONTROL	FINISH	CRI	CUSTOM
LRW TRIM	28 - 28W	A - Assymmetric	(CT27)	2700K	ND - ON/OFF	H - High(90)	XX - XXX
	36 - 36W		(CT30)	3000K	TR - TRIAC		
	43 - 43W		(CT40)	4000K	AN - 1-10V DA - DALI		

Sample: LRW TRIM - 28 - A - CT27 - ND - BK - H - XX