

RECESSED LINEAR WALLWASHER- TRIMLESS

LRW TRIMLESS-15-A-CT27-ND-BK-H-XX



YYZ Linear Recessed wallwasher gives architects and lighting designers creative design and abundant light environment. It has two options of installation, recessed and trimless mounted. Trimless design make ceiling integrated in high-quality application. In the aspect of optical, symmetrical, and asymmetrical lighting distribution apply to a variety of application. Linear light an ideal solution for high requirements of glare control for office project (UGR12), specially designed asymmetrical lighting distribution for wall washing effect apply to hotels, restaurants, public facilities, and office, etc.



FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	15/20 W
WORKING VOLTAGE	AC220 - 240 V 50/60Hz
RATED CURRENT	350 mA / 500 mA
NO OF LED	6 LED
RADIANCE ANGLE	Assymetric
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	35000 - 50000 hrs
DIMENSION	190x68x99mm(cutout194x50mm)
OPERATIN TEMP	-20° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Triac


- BRIDGELUX
LED Quality
- AC 220-240V
Working Current
- 15/20W
Rated power



ELECTRICAL DATA

POWER CONSUMPTION	15/20 W
SUPPLY VOLTAGE	AC220 - 240 V 50/60Hz
COLORS	2700K / 3000K / 4000K
CRI	90+

DIMENSION

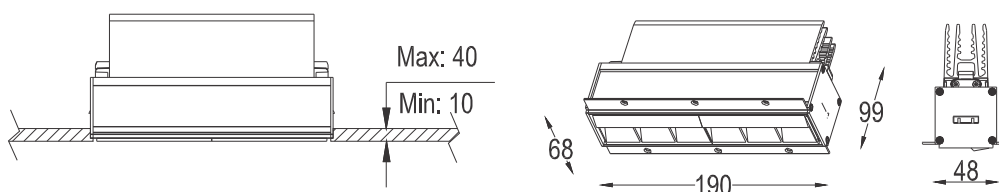

- L194*W50*H140mm
- Max:40mm

ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE		CONTROL	FINISH	CRI	CUSTOM
LRW TRIMLESS	15 - 15W 20 - 20W	A - Assymmetric	(CT27)	2700K	ND - ON/OFF	BK - Black	H - High(90)	XX - XXX
			(CT30)	3000K	TR - TRIAC	WH - White		
			(CT40)	4000K	AN - 1-10V DA - DALI			

Sample: LRW TRIMLESS - 15 - A - CT27 - ND - BK - H - XX