

RECESSED LINEAR WALLWASHER- TRIMLESS

LRW TRIMLESS-20-A-CT27-ND-BK-H-XX



YYZ Linear Recessed wallwasher gives architects and lighting designers creative design and abundant light environment. It has two options of installation, recessed and trimless mounted. Trimless design make ceiling integrated in high-quality application. In the aspect of optical, symmetrical, and asymmetrical lighting distribution apply to a variety of application. Linear light an ideal solution for high requirements of glare control for office project (UGR12), specially designed asymmetrical lighting distribution for wall washing effect apply to hotels, restaurants, public facilities, and office, etc.



FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	20/28/33 W
WORKING VOLTAGE	AC220 - 240 V 50/60Hz
RATED CURRENT	500 mA / 700 mA / 800 mA
NO OF LED	9 LED
RADIANCE ANGLE	Assymetric
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	35000 - 50000 hrs
DIMENSION	280x68x99mm(cutout284x50mm)
OPERATIN TEMP	-20° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Triac

BRIDGELUX
LED Quality

AC 220-240V
Working Current


20/28/33W
Rated power



ELECTRICAL DATA

POWER CONSUMPTION	20/28/33 W
SUPPLY VOLTAGE	AC220 - 240 V 50/60Hz
COLORS	2700K / 3000K / 4000K
CRI	90+

DIMENSION

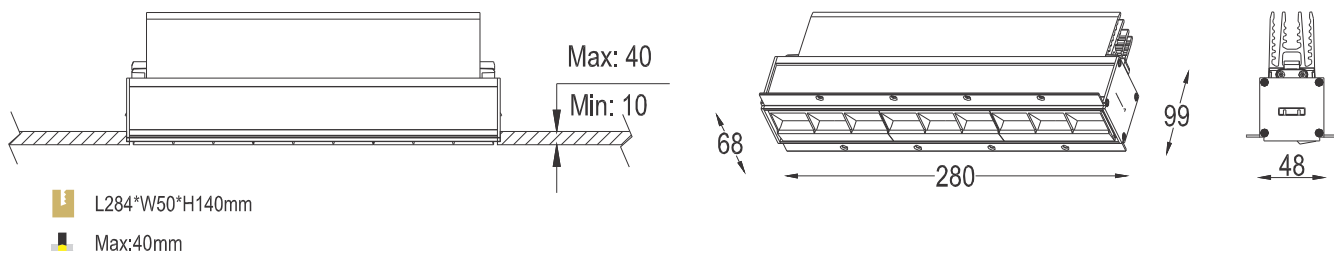

ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	CONTROL	FINISH	CRI	CUSTOM
LRW TRIMLESS	20 - 20W	A - Assymetric	(CT27)	2700K	ND - ON/OFF	H - High(90)	XX - XXX
	28 - 28W		(CT30)	3000K	TR - TRIAC		
	33 - 33W		(CT40)	4000K	AN - 1-10V DA - DALI		

Sample: LRW TRIMLESS - 20 - A - CT27 - ND - BK - H - XX