

# CORAL 3

## CRL 3

Mono IP65 CE

YYZ Coral downlights are specially designed for wet area applications like jacuzzi, toilets, balcony, exterior entrance that demands water proof construction and resistance to corrosion. Wide range of beam angle to cater to application specific requirements. Powered by high efficiency COB LED chip with its consistent performance ensured through a reliable heat sink.



### FEATURES

BODY	DIE-CAST ALUMINUM
FINISH	WHITE, BLACK, BRUSH SILVER
WORKING VOLTAGE	220-240V 50/60Hz
RATED POWER	30W
RADIANCE ANGLE	45°
LAMP LIFE	50,000 HRS
MOUNTING	CEILING RECESSED
DIMENSIONS	Ø220 x 90mm (CUT OUT Ø200mm)
OPERATION TEMP	-20° C - +50° C

LUMILEDS, CREE  
LED Quality


240 V AC  
Working Voltage

30W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	30W
SUPPLY VOLTAGE	220-240VAC
COLORS	3000K, 4000K, 6000K
CRI	80
LUMEN	92lm/W
SOURCE LUMEN	3000lm
DELIVERED LUMEN	2760lm
DIMMING	DRIVER BASED

### DIMENSIONS

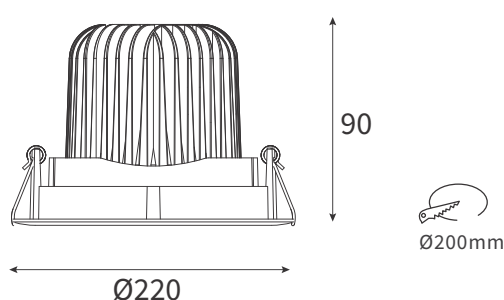

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH
CRL 3	30 - 30W	(CT30)	240VAC	45 - 45°	WH - White
		(CT40)			BK - Black
		(CT60)			BS - Brush Silver

Sample: CRL 3 - 30 - CT30 - 240 - 45 - WH