


CNA19

Mono IP20 CE

YYZ Ciana IP20 is a compact and streamlined luminaire that provides direct or indirect illumination from a suspended or surface mounted channel. The fixture is available with several LED lamping options including multiple outputs and CCTs, tunable white and colour changing RGB+White. These are mainly ideal for areas like office lighting, conference rooms, commercial and residential interior lighting.

FRAME


- CNA19SP : For suspended
- CNA19W : For wall
- CNA19SM : For surface mounted

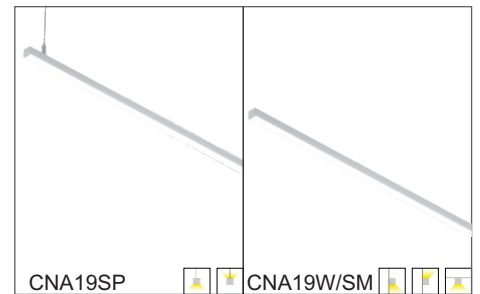

SIZE

SHAPE		LENGTH - A	LENGTH - B	LENGTH - C
STR	Straight			
SQ	Square			
REC	Rectangle			
LL	L - Left			
LR	L - Right			
CX	Cross			
TEE	T - Shape			
US	U - Shape			
ZL	ZED - Left			
ZR	ZED - Right			

SHAPES

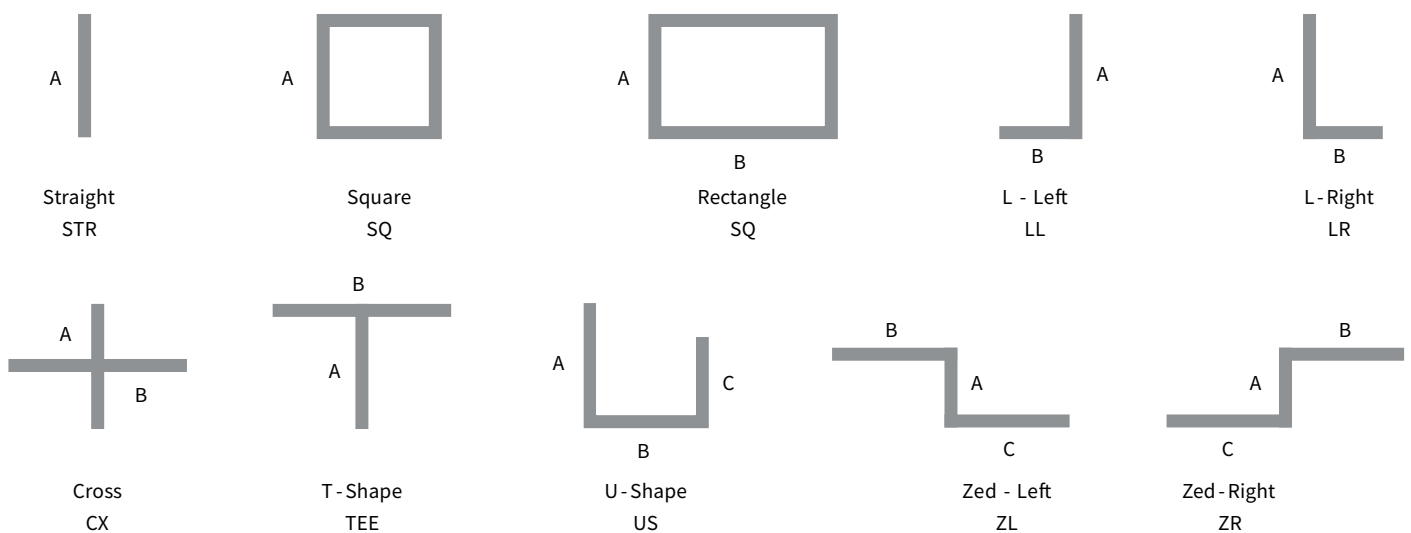

CNA19

LINEAR LAMPING & LENS

<u>DISTRIBUTION</u>	<u>OUTPUT</u>	<u>CRI</u>	<u>CCT</u>	<u>LENS</u>
DIRECT	LOW	80	2700K	DIFF Diffuse
INDIRECT	MED	90	3000K	
	RGBW^		3500K	
			4000K	
			5000K	
			6500K	

#Not available with surface mount

^For RGBW, CRI does not apply and select 3000K or 4000K CCT only. White LEDs can remain uncommissioned for RGB-only output.

DRIVER

NONDIM	-	Non-dimmable
DALI	-	DALI driver, dimming down to 1%
1/10V	-	1-10V, dimming down to 1%
0/10V	-	0-10V, dimming down to 0%
DMX^	-	DMX driver, dimming down to 1%
PHASE	-	For use with phase-cut triac, IGBT or sine wave dimmer switches

^DMX (or DALI) is required for use with RGBW

FINISH

AL	-	Anodised aluminium (standard)
WH	-	White powder coat
BLK	-	Black powder coat
BZ	-	Metallic bronze powder coat
RAL/	-	Custom RAL color powder coat (ex : #RAL/3000)

POWERFEED COLOUR

GP	-	Grey (Standard for suspended, default for other mountings)
WP	-	White
BP	-	Black
TP	-	Transparent
XP	-	Custom color (contact YYZ Lighting for options)

CNA19

CANOPY

- NONE - Select NONE when specifying wall or surface mount
- STD - 115mm canopy for each separate powerfeed and suspension point (standard)
- SMALL - 82mm canopy for each separate powerfeed and suspension point
- COMBO - 115mm combo canopy for locations with both a powerfeed and suspension point

OPTIONAL ADD-ONS


EMERGENCY

- EM - Integral, 3-hour emergency battery, manual testing


SENSOR

- PRES - Integral, PIR presence detector
- DALI/PRES - Integral, DALI-compatible PIR presence detector
- PHOTO - Integral, photocell/daylight detector

DIMENSIONS

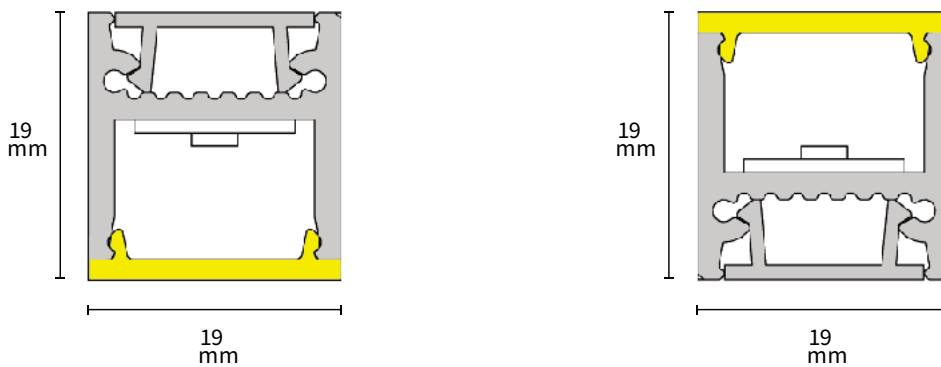

DISTRIBUTION

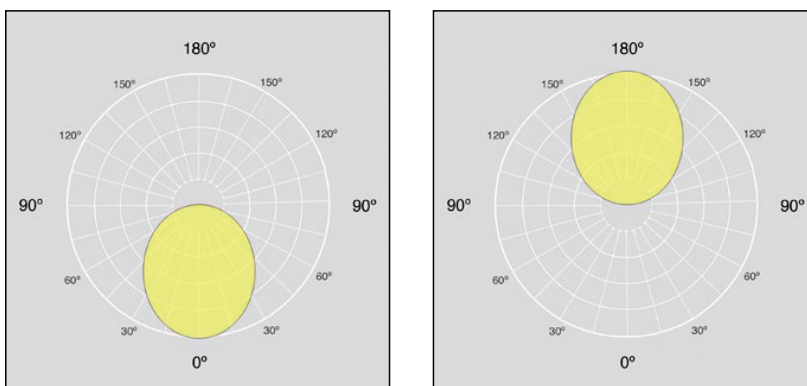

LINEAR LAMPING - OPTIONS & PERFORMANCE DATA

OUTPUT OPTIONS	DELIVERED LUMENS* LM/M	WATTS* W/M	EFFICACY* LM/W	CRI OPTIONS	CCT OPTIONS	LENS OPTIONS
LOW #	976	14.4	68	80 90	2700K 3000K 3500K 4000K 5000K 6500K	DIFF
MED #	1424	23.3	61			
RGBW	Colour-Changing RGB+White N/A (entire system) 210 (white only)	19.2 (entire system) 9 (white only)	N/A (entire system) 23 (white only)	N/A (entire system) 80 (white only)	3000K 4000K	

LENS OPTIONS

DIFF is a white satin diffuser lens that produces smooth, even light across the lens surface.




Difuse
DIFF/F


SUSPENSION MOUNTING CANOPY OPTIONS

Standard (STD) comprises separate 115 mm powerfeed canopy and cable bullet at powerfeed locations. SMALL comprises separate 85 mm powerfeed canopy and cable bullet at powerfeed locations. COMBO comprises combined 115mm canopy (canopy and cable bullet) at powerfeed locations.


All options include cable bullets for non-powerfeed locations.



Standard
STD



Small
SMALL



Combo
COMBO