

CORAL-1

CRL-1

Mono IP65 CE

YYZ Coral recessed LED downlights provides twiced reflection with extremely low glare even in presence of high luminous flux values. This IP65 rated warm LED light source is with aluminum body which provides protection from rain and humidity. It sets standards in terms of visual comfort, efficiency and quality of light for recessed luminaires. This series adopt the best technique of heat conduction, equip with heat resisting optic parts.



FEATURES

BODY	Body and heat sink in aluminum, Anti-glare optical reflector
MATERIAL	Aluminum
FINISH	White, Black
RATED POWER	8/12W
WORKING VOLTAGE	220-240V 50/60Hz
RADIANCE ANGLE	15°/24°/38°/50°
MOUNTING	Ceiling recessed
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø85x85mm(Cutout Ø75mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Triac, 1-10V, Dali

LUMILEDS, CREE, NICHIA
LED Quality


240 V AC
Working Voltage

8/12W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	8/12W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 3500K, 4000K
CRI	90+
LUMEN	600lm (8W), 1050lm (12W)

DIMENSIONS

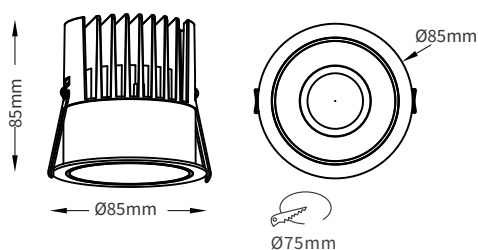

ACCESSORIES



ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	VOLTAGE	BEAM ANGLE	FINISH	ACCESSORIES
CRL-1	8 - 8W	(CT27) 2700K	ND - Non Dimmable	240VAC	15 - 15°	WH - White	HCL - Honey Combo Louver
	12 - 12W	(CT30) 3000K	DA - Dali		24 - 24°	BK - Black	LSL - Linear Spread Lens
		(CT35) 3500K	AN - 0-10V		38 - 38°		SP - Spread Lens
		(CT40) 4000K	TR - Triac		50 - 50°		

Sample: CRL-1 - 8 - CT27 - ND - 240 - 15 - WH

Note: This product shall not be used for applications where the fixture is exposed to direct sunlight.