

CORAL

CRL

Mono IP40/IP54 **CE**

YYZ Coral downlights are specially designed for wet area applications like jacuzzi, toilets, balcony, exterior entrance that demands water proof construction and resistance to corrosion. Wide range of beam angle to cater to application specific requirements. Powered by high efficiency COB LED chip with its consistent performance ensured through a reliable heat sink.



FEATURES

BODY	Die-cast aluminum
FINISH	White, Black
WORKING VOLTAGE	220-240V 50/60Hz
RATED POWER	6/10/13/18/25/35W
RADIANCE ANGLE	90°
LAMP LIFE	50,000 hrs
MOUNTING	Ceiling recessed, or Surface mounted
DIMENSIONS	Ø85x36, Ø110x45, Ø145x52, Ø190x52, Ø228x59mm
OPERATING TEMP	-20° C - +50° C

LUMILEDS, CREE
LED Quality


240 V AC
Working Voltage

6/10/13/18/25/35W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	6/10/13/18/25/35W
SUPPLY VOLTAGE	220-240Vac
COLORS	2700K, 3000K, 4000K, 5000K
CRI	80
LUMEN	100lm/W

DIMENSIONS

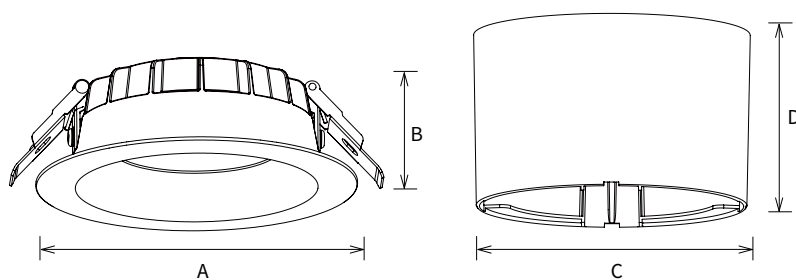

SIZE CHART

Watt	Size(AxB / CxDmm)	Cutout(mm)
6W	Ø85x36	Ø68-75
10W, 13W	Ø110x45	Ø90x95
13W, 18W	Ø145x52	Ø120-130
18W, 25W	Ø190x52	Ø160-170
18W, 25W, 35W	Ø228x59	Ø200-210

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH
CRL	6 - 6W	(CT27)	240VAC	90 - 90°	WH - White
	10 - 10W	(CT30)			BK - Black
	13 - 13W	(CT40)			
	18 - 18W	(CT50)			
	25 - 25W				
	35 - 35W				

Sample: CRL - 6 - CT27 - 240 - 90 - WH