

SMDLCH SURFACE MOUNTED LIGHT

SMDLCH-1078A-15

Mono IP40 CE

YYZ SMDLCH is surface mounted LED downlight where the light source is housed in a box, this light box is suitable for all commercial lighting applications as well as public indoor space and is available in white and black finishes.



FEATURES

MATERIAL	Aluminum
FINISH	White, Black
WORKING VOLTAGE	220-240V ac 50/60Hz
RATED POWER	12W
BEAM ANGLE	13°, 30°, 46°
LAMP LIFE	50,000 hrs
MOUNTING	Surface mounted
CONNECTION	Indoor rated connection
DIMENSIONS	190 x 47x75mm
OPERATION TEMP	-30° C - +50° C
CONTROL	Triac, 1-10V, Dali

BRIDGELUX
LED Quality


240 VOLTS
Working Voltage

12W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	12W
SUPPLY VOLTAGE	220-240Vac
COLORS	2700K, 3000K, 4000K, 5000K
CRI	80, 90
LUMEN	55 lm/W

DIMENSIONS

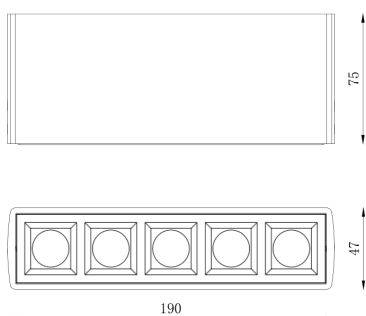

ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	VOLTAGE	FINISH	CUSTOM
SMDLCH-1078A-15	12 - 2x6W	13 - 13°	(CT27) 2700K	240 - 240VAC	WH - White	XX - XXXX
		30 - 30°	(CT30) 3000K		BK - Black	
		46 - 46°	(CT40) 4000K			
			(CT50) 5000K			

Sample: SMDLCH-1078A-15 - 12 - 13 - CT 27 - 240 - WH - XX