

HERMETIC DECO

HMT-D

Mono IP65 IK08

YYZ Hermetic is a tough and corrosion resistant surface/suspension mounted weatherproof luminaire suitable for application areas of high humid and dusty atmospheres. HMT-D is made of die-cast aluminum housing and a thick injection moulded polycarbonate cover, ensuring IK08 impact resistance. Wide beam optic and high efficiency makes it the best choice for use in garages, factories etc.



FEATURES

MATERIAL	Die-cast aluminum
FINISH	Grey
RATED POWER	15W
WORKING VOLTAGE	220-240V AC
RADIANCE ANGLE	120°
MOUNTING	Surface mounted, Suspended mounted
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	600(L) x 65 (W) x 56(H)mm
OPERATING TEMP	-25° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Triac, Micro-wave sensor

CITIZEN/NICHIA/SAMSUNG/LUMILEDS
LED Quality



220-240VAC
Working Voltage

15W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	15W
SUPPLY VOLTAGE	220-240V AC
COLORS	4000K, 6500K
CRI	80
LUMEN	130-150 lm/W

DIMENSION

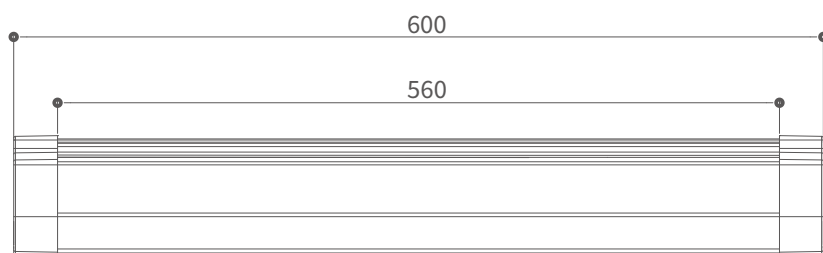

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	CUSTOM
HMT-D	15 - 15W	(CT40) 4000K (CT65) 6500K	ND - Non-Dimmable AN - 1-10V DA - Dali TR - Triac	XX - XXX

Sample: HMT-D - 15 - CT40 - ND - XX

HERMETIC DECO

HMT-D

Mono IP65 IK08

YYZ Hermetic is a tough and corrosion resistant surface/suspension mounted weatherproof luminaire suitable for application areas of high humid and dusty atmospheres. HMT-D is made of die-cast aluminum housing and a thick injection moulded polycarbonate cover, ensuring IK08 impact resistance. Wide beam optic and high efficiency makes it the best choice for use in garages, factories etc.



FEATURES

MATERIAL	Die-cast aluminum
FINISH	Grey
RATED POWER	20/34W
WORKING VOLTAGE	220-240V AC
RADIANCE ANGLE	120°
MOUNTING	Surface mounted, Suspended mounted
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	1200(L) x 65 (W) x 56(H)mm
OPERATING TEMP	-25° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Triac, Micro-wave sensor

CITIZEN/NICHIA/SAMSUNG/LUMILEDS
LED Quality



220-240VAC
Working Voltage

20W/34W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	20/34W
SUPPLY VOLTAGE	220-240V AC
COLORS	4000K, 6500K
CRI	80
LUMEN	130-150 lm/W

DIMENSION

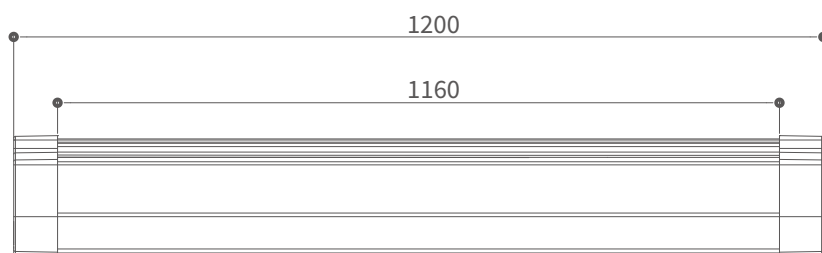

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	CUSTOM
HMT-D	20 - 20W	(CT40) 4000K	ND - Non-Dimmable	XX - XXX
	34 - 34W	(CT65) 6500K	AN - 1-10V	
			DA - Dali	
			TR - Triac	

Sample: HMT-D - 20 - CT40 - ND - XX

HERMETIC DECO

HMT-D

Mono IP65 IK08

YYZ Hermetic is a tough and corrosion resistant surface/suspension mounted weatherproof luminaire suitable for application areas of high humid and dusty atmospheres. HMT-D is made of die-cast aluminum housing and a thick injection moulded polycarbonate cover, ensuring IK08 impact resistance. Wide beam optic and high efficiency makes it the best choice for use in garages, factories etc.



FEATURES

MATERIAL	Die-cast aluminum
FINISH	Grey
RATED POWER	28/56W
WORKING VOLTAGE	220-240V AC
RADIANCE ANGLE	120°
MOUNTING	Surface mounted, Suspended mounted
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	1500(L) x 65 (W) x 56(H)mm
OPERATING TEMP	-25° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Triac, Micro-wave sensor

CITIZEN/NICHIA/SAMSUNG/LUMILEDS
LED Quality



220-240VAC
Working Voltage

28W/56W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	28/56W
SUPPLY VOLTAGE	220-240V AC
COLORS	4000K, 6500K
CRI	80
LUMEN	130-150 lm/W

DIMENSION

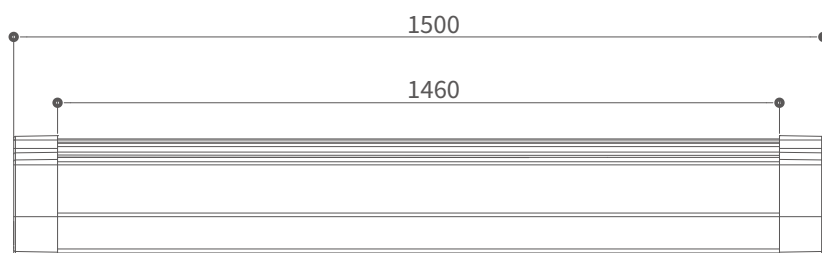

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	CUSTOM
HMT-D	28 - 28W	(CT40) 4000K	ND - Non-Dimmable	XX - XXX
	56 - 56W	(CT65) 6500K	AN - 1-10V	
			DA - Dali	
			TR - Triac	

Sample: HMT-D - 28 - CT40 - ND - XX

HERMETIC DECO

HMT-D

Mono IP65 CE IK08

YYZ Hermetic is a tough and corrosion resistant surface/suspension mounted weatherproof luminaire suitable for application areas of high humid and dusty atmospheres. HMT-D is made of aluminum housing and a thick injection moulded polycarbonate cover, ensuring IK08 impact resistance. Wide beam optic and high efficiency makes it the best choice for use in garages, factories etc.



FEATURES

MATERIAL	Aluminum
FINISH	Grey
RATED POWER	32/65W
WORKING VOLTAGE	220-240V AC
RADIANCE ANGLE	120°
MOUNTING	Surface mounted, Suspended mounted
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	1500(L) x 65 (W) x 56(H)mm
OPERATING TEMP	-25° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Triac

ELECTRICAL DATA



POWER CONSUMPTION	32/65W
SUPPLY VOLTAGE	220-240V AC
COLORS	4000K, 6500K
CRI	80
LUMEN	130-150 lm/W

CITIZEN/NICHIA/SAMSUNG/LUMILEDS
LED Quality

220-240VAC
Working Voltage

32W/65W
Rated power

DIMENSION

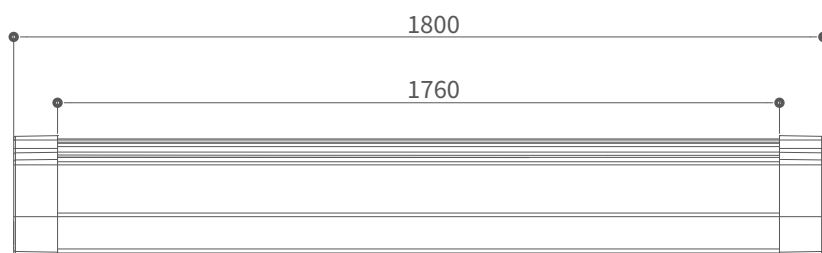

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	CUSTOM
HMT-D	32 - 32W	(CT40) 4000K	ND - Non-Dimmable	XX - XXX
	65 - 65W	(CT65) 6500K	AN - 1-10V	
			DA - Dali	
			TR - Triac	

Sample: HMT-D - 32 - CT40 - ND - XX