# **LFX NEON SERIES**



# LFX-O-10W-RGB-3838-XX-120-24V-CV-0612-XX-1-OC-N-C-S-L-N-5M









YYZ LFX Neon series is designed to provide a very bright, crisp consistent and homogenized illumination that will accentuate any building, structure, or artistic flourish. Using high brightness surface mounted LEDs, behind a first class eco-friendly UV-resistant PVC encapsulated flexible chamber material, the LFX Neon will provide your project with bright, consistent traces of light in shades of White, single colors. The fixture consists of uniform and even lighting with no Led hotspot. LFX Neon has a transverse minimum radius of 60mm. Easy to be installed, can be cut and re connected with IP67 protected connector. The product is supplied in 5m standard rolls-or custom as needed. Connectors at both ends offer ease of installation. Operating at 24V, the LFX Neon features on-board constant-current drive topology, which ensures consistent brightness along the entire run, precise drive current, and long life expectancy. Dimming is achieved with YYZ's dimming compatible power supplies.



#### **FEATURES**

LIGHT SOURCE 3838 Led LED QUANTITY 120Leds/m

FINISH PVC encapsulated flexible chamber material

WORKING VOLTAGE DC 24V
RATED POWER 10W/m
RADIANCE ANGLE 120°
LAMP LIFE 50000 hrs

MOUNTING Mounting clip / chanel
CONNECTION Outdoor rated connections

 $\begin{array}{lll} \text{CUTTING INCREMENTS} & 50\text{mm (1Unit)} \\ \\ \text{DIMENSIONS} & 6\text{mm(W)} \times 12\text{mm(H)} \\ \\ \text{OPERATION TEMP} & -20^{\circ}\text{ C} & -+45^{\circ}\text{ C} \\ \\ \text{STORAGE TEMP} & -20^{\circ}\text{ C} & -+60^{\circ}\text{ C} \\ \end{array}$ 

CONTINUOUS LENGTH 5mtr

#### **ELECTRICAL DATA**

POWER CONSUMPTION 10W/m SUPPLY VOLTAGE DC 24 V COLORS RGB







#### **ORDERING LOGIC**


PRODUCT SERIES	TYPE	POWER	COLOR TEMPE	RATURE	LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	WIDTH	CRI	NO OF LED ROWS	CONNECTION	
LFX	O - Outdoor (IP67)	10 - 10W	(RGB)	RGB	3838	XX	120 - 120 LEDs/mtr	24-24V	CV-Constant voltage	0612-06x12mr	n XX - XX	1	OC - Outdoor Connector	
									MODEL	CONTROL	LIGHT EMITTING DIRECTION	LED POWER	РСВ	LENGTH PER REEL
									N - Neon	C - Color (DMX-Non Addressable)	S - Side (Horizontal bendable)	L - Low	N - N	5M - 5mtr


# **LFX NEON SERIES**




LFX-O-10W-RGB-3838-XX-120-24V-CV-0612-XX-1-OC-N-C-S-L-N-5M

#### **DIMENSION**

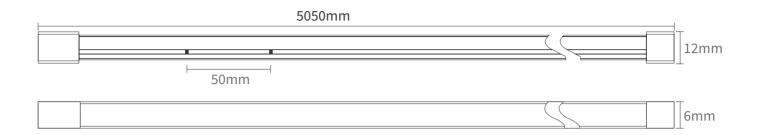



## **BENDING DETAILS**



## **ACCESSORIES**

