


LINEAR WALLWASHER SERIES

LWW MINI PLUS- Mono



YYZ LWW Mini Plus series is a new solution of large-scale high brightness architectural illumination like facade, bridge, retail and hospitality applications. This IP66 rated fixture is with AC line input, high performance linear luminaire for washing or grazing exterior facades. It is equipped with high-brightness LEDs, it offers impressive wall-washing and signage illumination. Available in multiple optic designs, this series can use a combination of color and beam angles to support a variety of architecture applications.

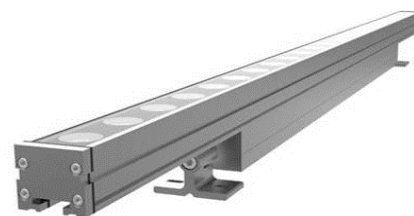

FEATURES

FINISH	6063 High density aluminum
WORKING VOLTAGE	100-277 Vac
RATED POWER	9/18/27/36W
BEAM ANGLE	15°, 20°, 30°, 50°. 10°x55°
AVAILABLE LENGTH	410mm, 600mm, 900mm, 1200mm
MOUNTING	Surface mounting
OPTIC	Clear tempered glass
DIMENSIONS	410, 600, 900, 1200(L) x 35.8(B) x 62.7(H)
OPERATING TEMP	-40° C - +50° C
STORAGE TEMP	-40° C - +85° C
LAMP LIFE	50,000 hrs
BODY COLOR	Black, Grey, White, Custom RAL
CONTROL	On/Off

CREE / NICHIA
LED Quality


100-277 VAC
Working Voltage

9W, 18W, 27W, 36W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	9/18/27/38W
SUPPLY VOLTAGE	100-277 Vac
COLORS	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
LUMEN	1400 lm/mtr

DIMENSION

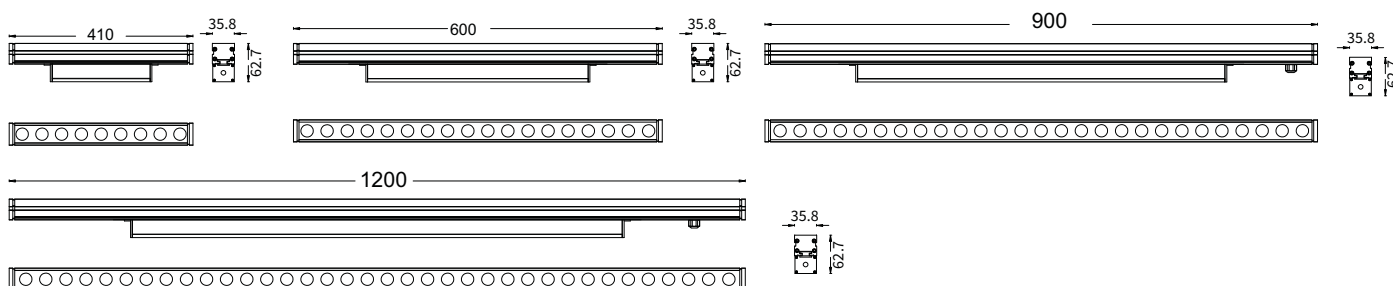

ORDERING LOGIC

PRODUCT	POWER	OPTIC	COLOR TEMPERATURE	CONTROL	VOLTAGE	FIXTURE LENGTH	BODY COLOR	CUSTOM
LWW MINI PLUS	9 - 9W (410mm)	15 - 15°	(CT27) 2700K	SW - On/Off	277 - 100-277VAC	410 - 410mm (9W)	BK - BLACK	XX
	18 - 18W (600mm)	20 - 20°	(CT30) 3000K			600 - 600mm (18W)	GR - GRAY	
	27 - 27W (900mm)	30 - 30°	(CT35) 3500K			900 - 900mm (27W)	WH - WHITE	
	36 - 36W (1200mm)	50 - 50°	(CT40) 4000K			1200 - 1200mm (36W)		
		10x55 - 10° x 55°	(CT50) 5000K					
			(CT57) 5700K					
			(CT65) 6500K					

Sample: LWW MINI PLUS - 9 - 15 - CT27 - SW - 277 - 410 - BK - XX


LWW MINI PLUS- Mono

ACCESSORIES



Item: YYZGLA-410/600/900/1200

Asymmetric anti-glare louver



Height with/without mounting bracket (YYZMBA-H81)




Item: YYZMBA-H81

Description: YYZMBA-H81 is an adjustable mounting option are used for applications that require angle adjustments. It can rotate up to 180 degree.




Item: YYZGLS-410/600/900/1200

Symmetric anti-glare louver



Height with/without mounting bracket (YYZMBA-H81)

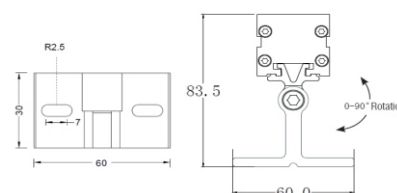

EXTENSION CABLE

On-Off, Triac



Item: YYZACF-300-3pin

3-pin 300mm female lead in cable to bare wire



Item: YYZENDCAPAC-3pin-M

3-pin cable male cable end cap



Item: YYZACL-010-3pin

3-pin 1 meters male to female extension cable



Item: YYZACL-020-3pin

3-pin 2 meters male to female extension cable

1-10V, Dali



Item: YYZACF-300-3pin-US

3-pin 300mm female Power lead in cable (T-connector) to bare wire



Item: YYZCF(Shield)-300-US

3-pin 300mm female data lead in cable (T-connector) to bare wire



Item: AC-LEADIN-T336

DLP Lead in T connector cable at the first fixture of the daisy chain. It combines the power and signal into a 6-pin male cable. (3-pin male end for Power, 6-pin male end for data, and 6 pin female end to the fixture)



Item: YYZ ENDCAP-AC-6pin

5-pin cable male cable end cap (AC series)



Item: YYZACL-010-6pin-US

6-pin 1 meter male to female extension cable



Item: YYZACL-020-6pin-US

6-pin 2 meters male to female extension cable