

# LINEAR WALLWASHER SERIES

## LWW Mini



YYZ LWW mini series linear light of new solution for large scale with high brightness architectural illumination. Its streamline design and aluminum profile along with adjustable brackets make it an elegant solution for wall washing and grazing applications. This IP66 rated modular system is available in 300mm, 500mm, or 1000mm lengths and can be customized as per project situations. Its integrated design of heat dissipating structure and degassing valve make it suitable for exterior architectural, retail and hospitality applications.



### FEATURES

FINISH	6063 High density aluminum
WORKING VOLTAGE	24Vdc
RATED POWER	6/12/24W
BEAM ANGLE	10°, 20°, 35°, 50°. 10x40°
AVAILABLE LENGTH	260mm, 500mm, 1000mm
MOUNTING	Surface mounting
OPTIC	PMMA
DIMENSIONS	260, 500, 1000(L) x 36(B) x 33.8(H)
OPERATION TEMP	-40° C - +50° C
STORAGE TEMP	-40° C - +85° C
LAMP LIFE	50,000 hrs
BODY COLOR	Black, Grey, White
CONTROL	On/Off, Triac, 0-10V, DALI

CREE / NICHIA  
LED Quality


24 V DC  
Working Voltage

6 W (260mm), 12 W(500mm)  
24 W(1000mm)  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	260mm-6W, 500mm-12W, 1000mm-24W
SUPPLY VOLTAGE	24 V dc
COLORS	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
CRI	90
LUMEN	100-110 lm/W @ 3500K

### DIMENSION

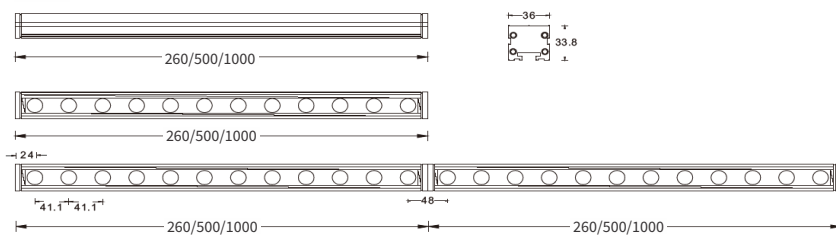

### ORDERING LOGIC

PRODUCT	POWER	OPTIC	COLOR TEMPERATURE	CONTROL	VOLTAGE	FIXTURE LENGTH	BODY COLOR	CUSTOM
LWW -Mini	6 - 6W (260mm)	10 - 10°	(CT27)	2700K	SW - On/Off	24 - 24V DC	BK - BLACK	XX
			(CT30)	3000K	TR - Triac			
	12 - 12W (500mm)	20 - 20°	(CT35)	3500K	AN - 0-10V	50 - 500mm (12W)	GR - GRAY	
			(CT40)	4000K	DA - DALI			
	24 - 24W (1000mm)	35 - 35°	(CT50)	5000K		100 - 1000mm (24W)	WH - WHITE	
			(CT57)	5700K				
			(CT65)	6500K				
			10x40 - 10° x 40°					


Sample: LWW -Mini - 6 - 10 - CT27 - SW - 24 - 26 - BK - XX

## LWW Mini

### ANTI-GLARE ACCESSORIES




LWW-Mini GLA-260/500/1000  
YYZ LWW-Mini anti-glare lower asymmetric

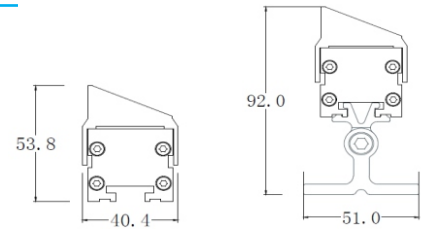

Height with/without mounting bracket (YYZMBA)




LWW-Mini GLA-260/500/1000  
YYZ LWW-Mini anti-glare lower symmetric

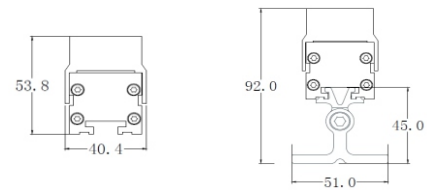

Height with/without mounting bracket (YYZMBA)




LWW-Mini GLA(MC)-260/500/1000  
YYZ LWW-Mini anti-glare lower asymmetric with fixed mounting clip



Height with fixed mounting chip (YYZMBF)



LWW-Mini GLA(MC)-260/500/1000  
YYZ LWW-Mini anti-glare lower symmetric with fixed mounting





Height with fixed mounting chip (YYZMBF)

### MOUNTING ACCESSORIES


**Item: YYZMBF**

Description: Fixed mounting clips are used where pre-installation is needed. After fixing the clip to the installation area, the wall washer can be snapped on the clip directly.

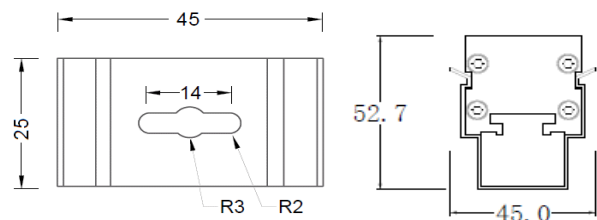

**Item: YYZMBA**



Description: YYZMBA are used for applications that require angle adjustments. It can rotate up to 180 degrees.

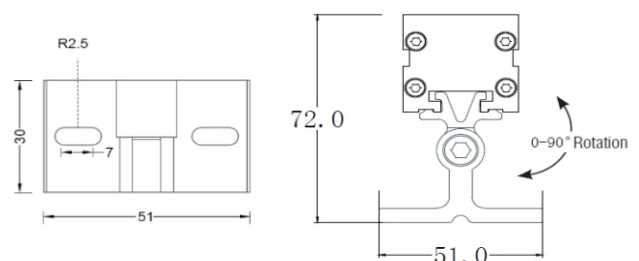









## LWW Mini

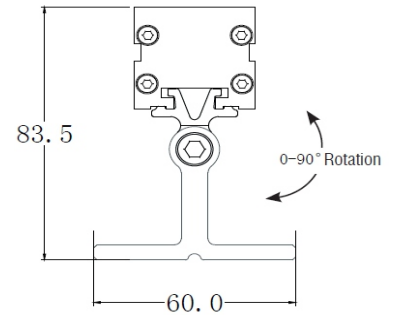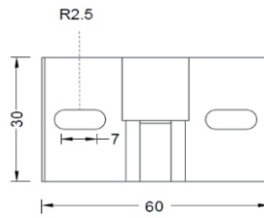**Item: YYZMBA-H81**

Description: YYZMBA-H81 is another adjustable mounting option are used for applications that require angle adjustments.



## CABLES

On/Off, Triac:	
 <b>Item: YZCF-300-2pin</b> 2-pin 300mm female lead in cable to bare wire	 <b>Item: YZ ENDCAP-2pin-M</b> 2-pin cable male cable end cap
 <b>Item: YYZDCL-020-2pin</b> 2-pin 2 meters male to female extension cable	 <b>Item: YYZDCL-100-2pin</b> 2-pin 10 meters male to female extension cable
0-10V, Dali (PWM version):	
 <b>Item: YYZDCF-300-3pin</b> 3-pin 300mm female lead in cable to bare wire	 <b>Item: YZ ENDCAP-3pin-M</b> 3-pin cable male cable end cap
 <b>Item: YYZDCL-020-3pin</b> 3-pin 2 meters male to female extension cable	 <b>Item: YYZDCL-100-3pin</b> 3-pin 10 meters male to female extension cable