

APERTURE-2.5


APR2.5, APR2.5T & APR2.5TF



YYZ Aperture 2.5 is a waterproof recessed canopy light made of 100% recyclable, extruded architectural grade T6061 aluminum. It is equipped with high power LED light source and optical lens with a wide range of color temperature which provide superior color consistency and high CRI. This linear LED luminaire is designed to produce a uniform distribution of diffused light and is suitable for ceiling, wall and floor.


FEATURES

HOUSING	100% Recyclable, extruded architectural grade t6061 aluminium
BEAM ANGLE	120°
MOUNTING	Recessed (trimless), recessed (with trim), Recessed (with Trim) - for mounting in Floor
OPTIC	Standard lens(regressed position)-standard for ceiling or wall Hi impact lens(flush position)- standard for floor fixture
DIMENSIONS	63x91mm(APR2.5), 93x77mm(APR2.5T), 93x125mm(APR2.5T)
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 hrs
AVAILABLE LENGTH	500mm, 1000mm, 1500mm
CONTROL	On/Off, Dali, 1-10V
LUMEN	63lm/W(Standard), 62lm/W(Hi)

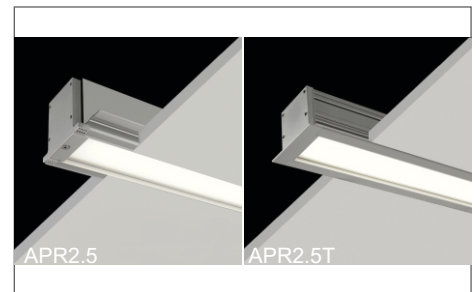

- CREE/SAMSUNG LED Quality
- 240V AC Working Voltage
- 24.3W, 36W/, 62W, 63W/Mtr Rated power

DIMENSION

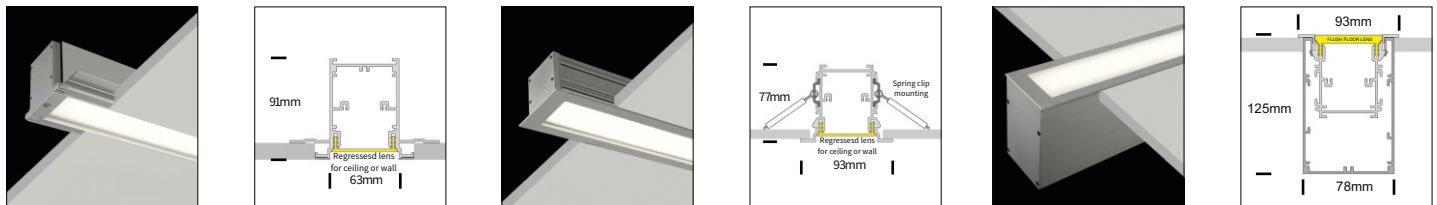

APR2.5 (CEILING RECESSED- TRIMLESS)

APR2.5T (CEILING RECESSED- WITH TRIM)

APR2.5TF (FLOOR RECESSED- WITH TRIM)

ORDERING LOGIC

PRODUCT	WATTAGE	CRI	COLOR TEMPERATURE	DRIVER	FIXTURE LENGTH	FINISH
APR2.5	24.3 - 24.3W/Mtr	80	(CT27) 2700K	SW - ON-OFF	50 - 500mm	AL - Aluminium natural
APR2.5T	36 - 36W/Mtr	90	(CT30) 3000K	AN - 0-10V	100 - 1000mm	BK - Black powder coat
APR2.5TF(Floor)	62 - 62W/Mtr 63 - 63W/Mtr		(CT35) 3500K	DA - DALI	150 - 1500mm	WH - White powder coat
			(CT40) 4000K	DM - DMX	XX - CUSTOM	XX - Custom
			(CTXX) Custom			

Sample: APR2.5 - 24.3 - 80 - CT27 - SW - 50 - AL