

MARKER MINI 64

MKR-MI 64

Mono IP67 CE

Sturdy and sleek inground fitting made of 316 grade stainless steel designed to withstand high salinity environment. Available in specially engineered 4 different optical distribution to ensure utmost design flexibility and minimum glare.



FEATURES

MATERIAL	Stainless steel 316 grade
FINISH	Stainless steel
RATED POWER	3W, 5W
RADIANCE ANGLE	15°, 24°, 38°, 60°
MOUNTING	Floor recessed
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø64x74mm
OPERATING TEMP	-20° C - +50° C
CONTROL	Switched, 1-10V, Dali, Triac (Driver based)
OPTICS	Lens
SDCM	2

CREE / OSRAM
LED Quality


CONSTANT VOLTAGE

3W/5W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	3W, 5W
COLORS	2700K, 3000K, 4000K, 5000K, 5700K
CRI	>90

DIMENSION

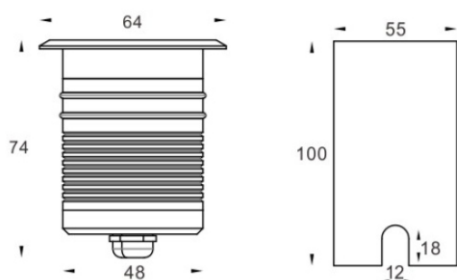

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	BEAM ANGLE	FINISH	CUSTOM
MKR-MI 64	3 - 3W	(CT27)	2700K	SW - Switched	15° - 15°	SS - Stainless steel xx
		(CT30)	3000K	AN - 1-10V	24° - 24°	
	(CT40)	4000K	DA - Dali	38° - 38°		
	(CT50)	5000K	TR - Triac	60° - 60°		
	(CT57)	5700K				

Sample: MKR-MI 64 - 3W - CT30 - SW - 15 - SS - XX