

MARKER MINI 52

MKR-MI 52

Mono IP67 CE

Sturdy and sleek inground fitting made of 316 grade stainless steel designed to withstand high salinity environment . Available in specially engineered 6 different optical distribution to ensure utmost design flexibility and minimum glare.



FEATURES

MATERIAL	Stainless steel 316 grade
FINISH	Stainless steel
RATED POWER	3W
RADIANCE ANGLE	5°, 8°, 10°, 17°, 25°, 40°
MOUNTING	Floor recessed
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø52x69mm
OPERATING TEMP	-20° C - +50° C
CONTROL	Switched, 1-10V, Dali, Triac (Driver based)
OPTICS	Lens
SDCM	2

CREE / OSRAM
LED Quality


CONSTANT VOLTAGE

3W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	3W
COLORS	2700K, 3000K, 4000K, 5000K, 5700K
CRI	>90

DIMENSION

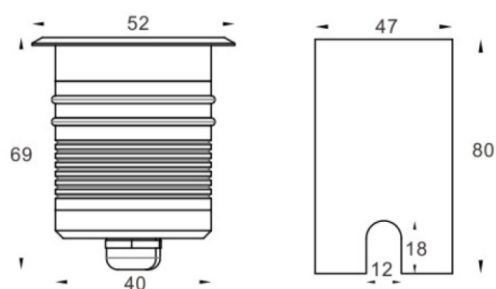

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	BEAM ANGLE	FINISH	CUSTOM
MKR-MI 52	3 - 3W	(CT27)	2700K	SW - Switched	5 - 5°	SS - Stainless steel
		(CT30)	3000K	AN - 1-10V	8 - 8°	
		(CT40)	4000K	DA - Dali	10 - 10°	
		(CT50)	5000K	TR - Triac	17 - 17°	
		(CT57)	5700K		25 - 25°	
					40 - 40°	

Sample: MKR-MI 52 - 3 - CT27 - SW - 5 - SS - XX