

LINEAR WALLWASHER PRO SERIES

LWW PRO-RGB/RGBW



YYZ Linear wall washer Pro series linear light is new solution for large-scale. High-brightness architectural illumination. Streamline design with 6063 high aluminium alloy and easy installation. Integrated design of heat dissipating structure and professional degassing valve device. The modular system available in 410mm, 605mm or 1190mm lengths and can be customized as per project situation, IP66 structural waterproof suitable for a wide range of wall grazing, linear and indirect illumination for exterior architectural, retail and hospitality applications.



FEATURES

LED QUANTITY	12 LED/ft
FINISH	6063 HIGH DENSITY ALUMINUM
WORKING VOLTAGE	100-277 V AC 50/60Hz
RATED POWER	16/24/48W
BEAM ANGLE	10°, 20°, 35°, 50°. 10x40°
AVAILABLE LENGTH	410MM, 605MM, 1190mm
MOUNTING	SURFACE MOUNTING
OPTIC	CLEAR TEMPERED GLASS
DIMENSIONS	410, 605, 1190(L) x 50(B) x 69.3(H)
OPERATION TEMP	-40° C - +50° C
STORAGE TEMP	-40° C - +85° C
LUMEN OUTPUT	1500 Lm all on RGBW
LAMP LIFE	70000 Hrs
BODY COLOR	BLACK, GRAY, WHITE
CONTROL	DMX, DALI, 0-10V, ON/OFF


- CREE / NICHIA LED Quality
- 100-240 VAC Working Voltage
- 16 W (410mm), 24 W(605mm), 48 W(1190mm) Rated power

ELECTRICAL DATA

POWER CONSUMPTION	410mm-16W, 605mm-24W, 1190mm-48W
SUPPLY VOLTAGE	100-240 V AC 50/60Hz
COLORS	RGB, RGBW
CRI	80, 90+



DIMENSION

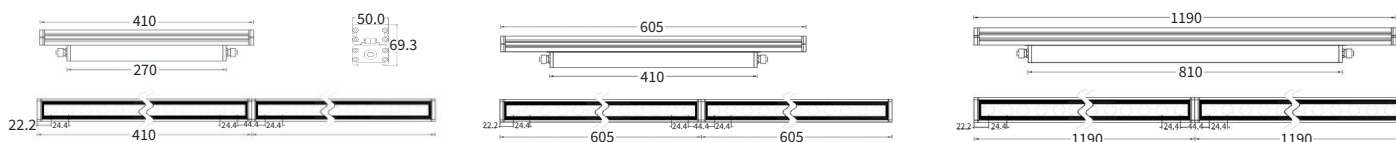


ORDERING LOGIC

PRODUCT	POWER	OPTIC	COLOR TEMPERATURE	CONTROL	VOLTAGE	FIXTURE LENGTH	BODY COLOR	CUSTOM
LWW PRO	16 - 16W (410mm)	10	10° (RGB)	DX - RGB	240 - 100-240VAC	410 - 410mm (16W)	BK - BLACK	XX
	24 - 24W (605mm)	20	20° (RGBW)	DA - RGBW		605 - 605mm (24W)	GR - GRAY	
	48 - 48W (1190mm)	35	35°	AN - Analogue (0-10v)		1190 - 1190mm (48W)	WH - WHITE	
		50	50°	SW - ON/OFF				
		10x40	10° x 40°					


Sample: LWWPRO - 16 - 20 - RGB - DX - 240 - 410 - BK - XX

LWW PRO-RGB


ANTI-GLARE ACCESSORIES




Item: YYZAGS-410/605/1190
Anti-glare shield

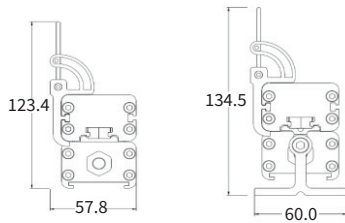

Height with/without mounting bracket (YYZMBA-H81)




Item: YYZGLA-410/605/1190-RGBW
Asymmetric anti-glare louver

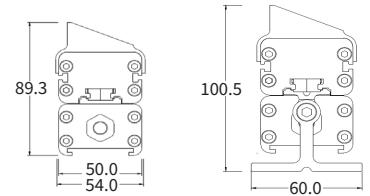

Height with/without mounting bracket (YYZMBA-H81)





Item: YYZGLS-410/605/1190-RGBW
Symmetric anti-glare louver

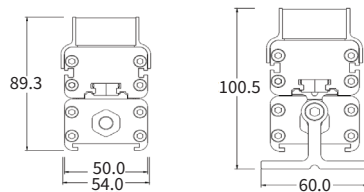

Height with/without mounting bracket (YYZMBA-H81)



Item: YYZMBA-H81
Description: YYZMBA-H81 is an adjustable mounting option are used for applications that require angle adjustments. It can rotate up to 180°



EXTENSION CABLE



Item: YYZACF-300-3pin
3-pin 300mm female Power lead in cable to bare wire

Item: YYZDCAPAC-3pin-M
3-pin cable male cable end cap



Item: YYZACL-020-3pin
3-pin 2 meters male to female extension cable



Item: YYZACL-100-3pin
3-pin 10 meters male to female extension cable

YYZ P0427(65).35



Item: YYZDCF-300-3pin
3-pin 300mm female lead in cable to bare wire



Item: YYZDCAP-3pin-M
3-pin cable male cable end cap/DMX Terminator



Item: YYZ-XLR-ECDCF
XLR-3 connector to 3-pin female connector. Customized DMX data lead in cable which connects the DMX controller with XLR-3 sockets to the first fixture of the daisy chain



Item: YYZDCL-020-3pin
3-pin 2 meters male to female extension cable



Item: YYZDCL-100-3pin
3-pin 10 meters male to female extension cable