

LINEAR WALLWASHER

LRW38-RGB/RGBW



YYZ LRW is wall washer series linear light of new solution for large scale with high brightness architectural illumination. Its streamline design and aluminum profile along with adjustable brackets make it an elegant solution for wall washing and grazing applications. This IP66 rated modular system is available in 300mm, 500mm, or 1000mm lengths and can be customized as per project situations. Its integrated design of heat dissipating structure and degassing valve make it suitable for exterior architectural, retail and hospitality applications.

FEATURES

FINISH	6063 Aluminum
WORKING VOLTAGE	24V dc
RATED POWER	24, 36, 48W/mtr
BEAM ANGLE	15°, 30°, 45°, 15°x60°, 20°x40°
MOUNTING	Surface mounting
OPTIC	PC
DIMENSIONS	1000(L) x 38(W) x 57.2(H)mm
OPERATION TEMP	-25° C - +50° C
STORAGE TEMP	-40° C - +80° C
WEIGHT	1.5kg
LAMP LIFE	50000 hrs
BODY COLOR	Black, Grey, White, Green
CONTROL	Dmx512





- CREE LED Quality
- 24V DC Working Voltage
- 24/36/48W/mtr Rated power

ELECTRICAL DATA

SUPPLY VOLTAGE	24V dc
COLORS	RGB, RGBW
LUMEN	32-32.5lm/W @ 24W-RGB, 38-40.5lm/W @ 24W-RGBW 39-40.5lm/W @ 48W-RGBW

DIMENSION

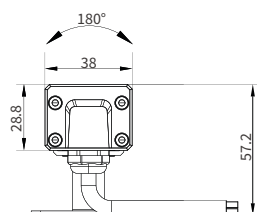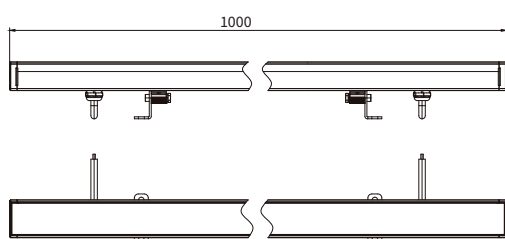

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAMANGLE	BODY COLOR	ACCESSORIES	CUSTOM
LRW38	24 -	24W (RGB)	DC - 24VDC	15 -	BK - Black GR - Grey WH - White GN - Green	LL - Longitudinal Louvers	XX - XXX
	36 -	36W (RGBW)		30 -		LB - Light Baffle	
	48 - 48W(RGBW)			45 -		SB - Semicircle Bull's-eye	
				15x60 -		15°x60°	
				20x40 -		20°x40°	

Sample: LRW38 - 24 - RGB - DC - 15 - BK - LL - XX